Sensori di temperatura passivi
Passive temperature probes

CAREL

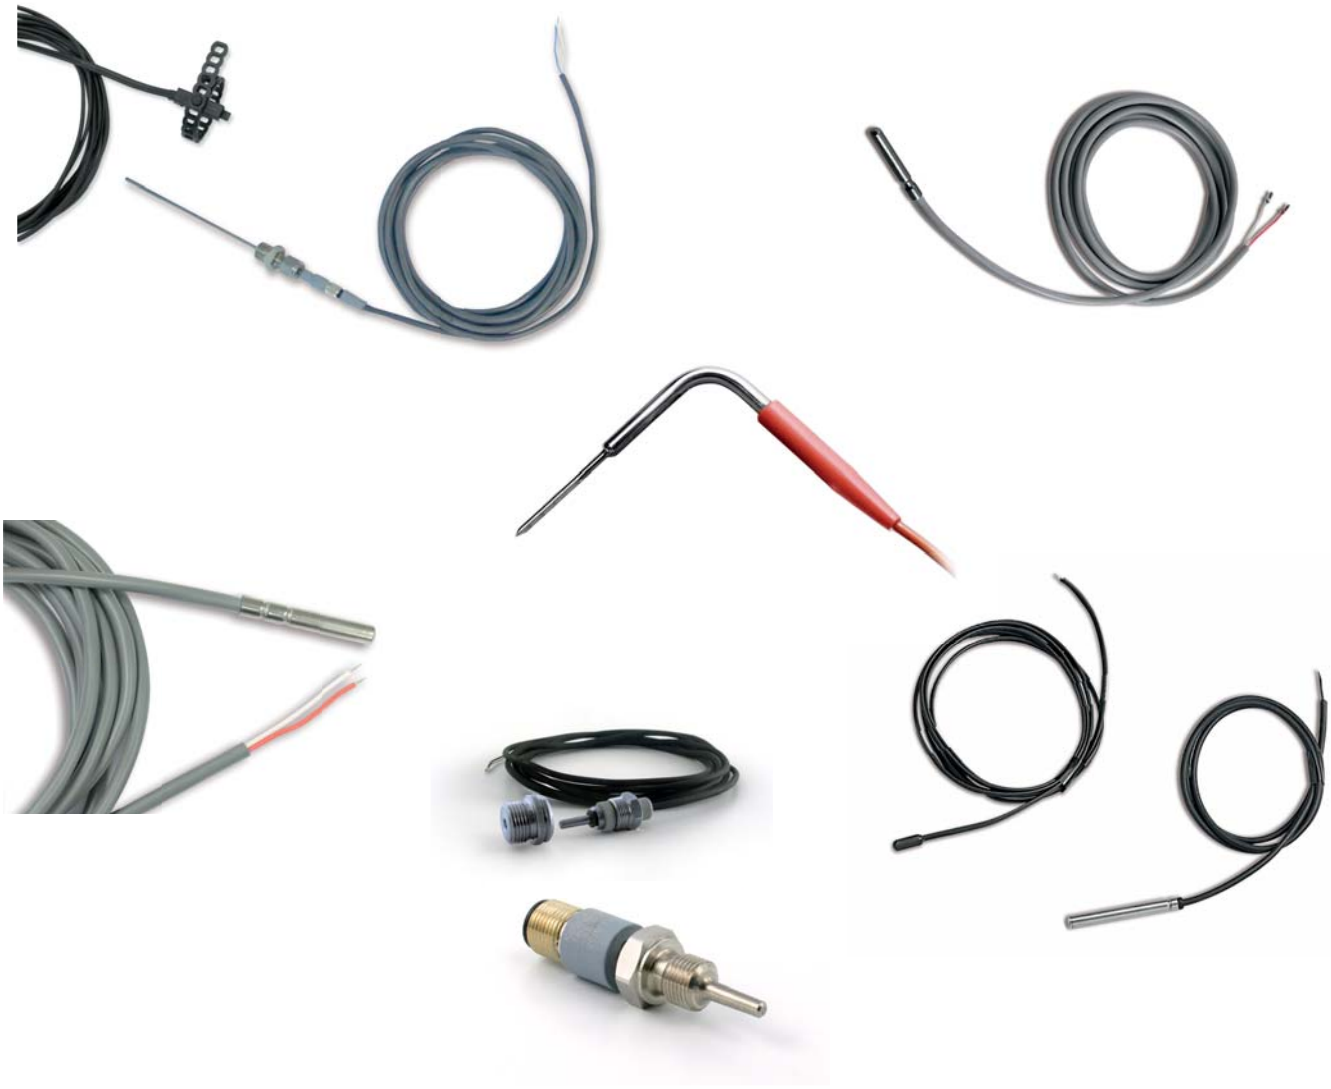

ITA Manuale d'uso

ENG User manual

LEGGI E CONSERVA QUESTE ISTRUZIONI

READ AND SAVE THESE INSTRUCTIONS



READ CAREFULLY IN THE TEXT!

Integrated Control Solutions & Energy Savings

IMPORTANT

CAREL bases the development of its products on decades of experience in HVAC, on the continuous investments in technological innovations to products, procedures and strict quality processes with in-circuit and functional testing on 100% of its products, and on the most innovative production technology available on the market. CAREL and its subsidiaries nonetheless cannot guarantee that all the aspects of the product and the software included with the product respond to the requirements of the final application, despite the product being developed according to start-of-the-art techniques. The customer (manufacturer, developer or installer of the final equipment) accepts all liability and risk relating to the configuration of the product in order to reach the expected results in relation to the specific final installation and/or equipment. CAREL may, based on specific agreements, acts as a consultant for the positive commissioning of the final unit/application, however in no case does it accept liability for the correct operation of the final equipment/system.

The CAREL product is a state-of-the-art product, whose operation is specified in the technical documentation supplied with the product or can be downloaded, even prior to purchase, from the website www.carel.com.
Each CAREL product, in relation to its advanced level of technology, requires setup/configuration/programming/commissioning to be able to operate in the best possible way for the specific application. The failure to complete such operations, which are required/indicated in the user manual, may cause the final product to malfunction; CAREL accepts no liability in such cases.
Only qualified personnel may install or carry out technical service on the product.
The customer must only use the product in the manner described in the documentation relating to the product.
In addition to observing any further warnings described in this manual, the following warnings must be heeded for all CAREL products:

- Prevent the electronic circuits from getting wet. Rain, humidity and all types of liquids or condensate contain corrosive minerals that may damage the electronic circuits. In any case, the product should be used or stored in environments that comply with the temperature and humidity limits specified in the manual.
- Do not install the device in particularly hot environments. Too high temperatures may reduce the life of electronic devices, damage them and deform or melt the plastic parts. In any case, the product should be used or stored in environments that comply with the temperature and humidity limits specified in the manual.
- Do not attempt to open the device in any way other than described in the manual.
- Do not drop, hit or shake the device, as the internal circuits and mechanisms may be irreparably damaged.
- Do not use corrosive chemicals, solvents or aggressive detergents to clean the device.
- Do not use the product for applications other than those specified in the technical manual.

All of the above suggestions likewise apply to the controllers, serial boards, programming keys or any other accessory in the CAREL product portfolio.
CAREL adopts a policy of continual development. Consequently, CAREL reserves the right to make changes and improvements to any product described in this document without prior warning.
The technical specifications shown in the manual may be changed without prior warning.
The liability of CAREL in relation to its products is specified in the CAREL general contract conditions, available on the website www.carel.com and/or by specific agreements with customers; specifically, to the extent where allowed by applicable legislation, in no case will CAREL, its employees or subsidiaries be liable for any lost earnings or sales, losses of data and information, costs of replacement goods or services, damage to things or people, downtime or any direct, indirect, incidental, actual, punitive, exemplary, special or consequential damage of any kind whatsoever, whether contractual, extra-contractual or due to negligence, or any other liabilities deriving from the installation, use or impossibility to use the product, even if CAREL or its subsidiaries are warned of the possibility of such damage.

DISPOSAL OF THE PRODUCT



The product is made up of metal parts and plastic parts.
In reference to European Union directive 2002/96/EC issued on 27 January 2003 and the related national legislation, please note that:

1. WEEE cannot be disposed of as municipal waste and such waste must be collected and disposed of separately;
2. the public or private waste collection systems defined by local legislation must be used. In addition, the equipment can be returned to the distributor at the end of its working life when buying new equipment;
3. the equipment may contain hazardous substances: the improper use or incorrect disposal of such may have negative effects on human health and on the environment;
4. the symbol (crossed-out wheeled bin) shown on the product or on the packaging and on the instruction sheet indicates that the equipment has been introduced onto the market after 13 August 2005 and that it must be disposed of separately;
5. in the event of illegal disposal of electrical and electronic waste, the penalties are specified by local waste disposal legislation.

If the appliance is used in a way that is not described by the manufacturer, the specified level of protection may be affected.



READ CAREFULLY IN THE TEXT!

WARNING: separate as much as possible the probe and digital input signal cables from the cables carrying inductive loads and power cables to avoid possible electromagnetic disturbance.
Never run power cables (including the electrical panel wiring) and signal cables in the same conduits

Content

1. INTRODUCTION 7

1.1 General description 7

2. NTC TECHNICAL SPECIFICATIONS 7

2.1 Models NTC*HP* 7
2.2 Models NTC*WF* 8
2.3 Models NTC*WP* 8
2.4 Models NTC*WH* 10
2.5 Models NTC*WG* 11
2.6 Models NTC*HT* 11
2.7 Models NTC*HF* 12
2.8 Models NTC*PS* 12

3. NTC IMMERSION PROBE TECHNICAL SPECIFICATIONS 13

3.1 Model TSN1300000 13
3.2 Model TSC1500030 14

4. NTC PIERCING PROBE TECHNICAL SPECIFICATIONS 16

4.1 Models NTC*INF* 16
4.2 Model NTCINF0340 17

5. TABLE OF TEMPERATURE VALUES 18

Table of temperature-resistance values for NTC sensor 10K@25°C ß 3435 18
Table of temperature-resistance values for NTC sensor 50K@25°C ß 3977 19

6. PT100 PROBE TECHNICAL SPECIFICATIONS 20

6.1 Models PT100 20

7. TABLE OF TEMPERATURE VALUES PT100 PROBE 21

7.1 Table of temperature values PT100 Probe Class B 21

8. PT1000 PROBE TECHNICAL SPECIFICATIONS 22

8.1 Models PT1*HP* 22
8.2 Models PT1*WF* 22
8.3 Models PT1*WP* 23
8.4 PT1*HT* Models 24
8.5 Models PT1*HF 24
8.6 Models PT1*PS* 25

9. PT1000 IMMERSION PROBE TECHNICAL SPECIFICATIONS 26

9.1 Model TST1300000 26
9.2 Model TSM1500B30 27
9.3 Models TSQ15MAB00 29

10. PT1000 PIERCING PROBE TECHNICAL SPECIFICATIONS 30

10.1 Model PT1INF0340 30

11. PTC TECHNICAL SPECIFICATIONS 31

11.1 Models PTC0150000 – PTC0600000 31
11.2 Models PTC015W000 - PTC060W000 - PTC060WA00 31
11.3 Models PTC03000W1 - PTC03003000D1 - PTC03000G1 32

12. LIGHT SENSOR TECHNICAL SPECIFICATIONS 33

12.1 Model PSOPZLHT00 33
12.2 Sensitive element specifications 33

13. ACCESSORIES 34

1. INTRODUCTION

1.1 General description

The Carel passive temperature probes are devices that, when connected to the controller, provide a resistance value, which is then converted to a temperature by the electronic controller. These are used in HVAC/R applications, and represent a complete range capable of satisfying a variety of needs in different installations. The probes are made using materials that guarantee constant quality.

The range includes various models that differ based on the performance of the system and the fields of application. The probes have different types of sensor (NTC, PTC, Pt1000), caps, index of protection, cable length, operating ranges and mechanical dimensions.

In addition, models are available for use in hydronic systems, applied directly onto the tubing, which simplify installation and offer a faster response in the reading, improving the wiring of the HVAC/R unit and improving performance.

The probes are used together with Carel electronic controllers (parametric and programmable).

2. NTC TECHNICAL SPECIFICATIONS

2.1 Models NTC*HP*

Storage conditions	-20T70 °C
Operating range	-50T105 °C in air
	-50T50 °C in fluid
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Dissipation factor (in air)	approx. 3 mW/°C
Thermal constant over time (in air)	approx. 75 s
Cable	Black two-wire flat cable, with tinned copper wire size 0.3 mm^2
Sensitive element index of protection	IP67
Sensitive element housing	Polyolefin
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Category of resistance to heat and fire	Flame retardant
Standard	NSF

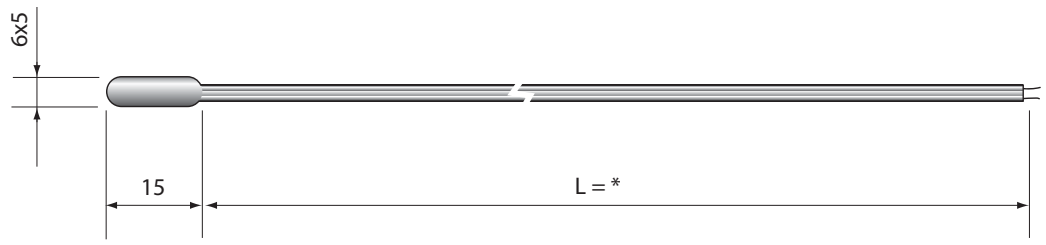

* = see table of product codes in price list

Warning: all measures present in this manual are in millimeters.

2.2 Models NTC*WF*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Dissipation factor (in air)	approx. 7 mW/°C
Thermal constant over time (in water)	approx. 4.5 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max.
Sensitive element index of protection	IP67
Sensitive element housing	AISI 316 steel diameter 4 mm - L= 30 mm
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant

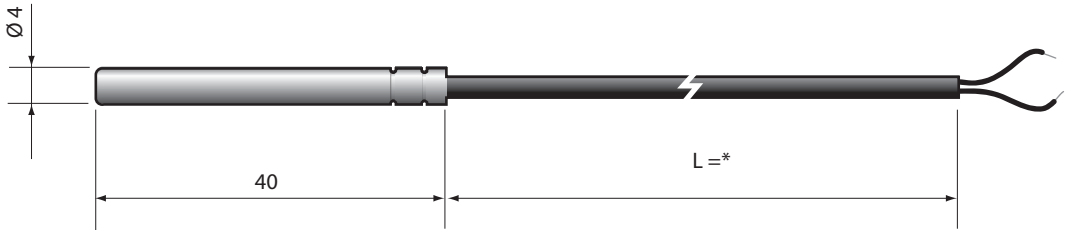

* = see table of product codes in price list

2.3 Models NTC*WP*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Dissipation factor (in air)	approx. 2.2 mW/°C
Thermal constant over time (in water)	approx. 20 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max
Sensitive element index of protection	IP68 Immersion in water 1 m depth for 200 h at 70 °C Resistance in autoclave to saturated steam 30 min. at 105 °C
Sensitive element housing	PP/Co with AISI 316 outer cap
Classification according to protection against electric shock (sensitive element & cable)	Supplementary insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant
Standard	NSF

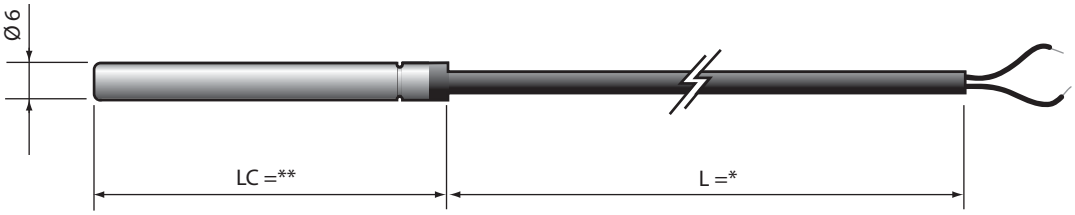

Version 1

* = see table of product codes in price list
* *= 52/100/200/300(mm dimension)

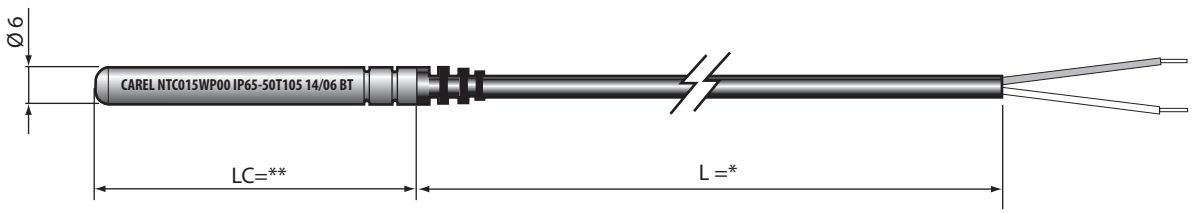

Version 2

Accessories

Socket: nickel-coated brass - 1413306AXX

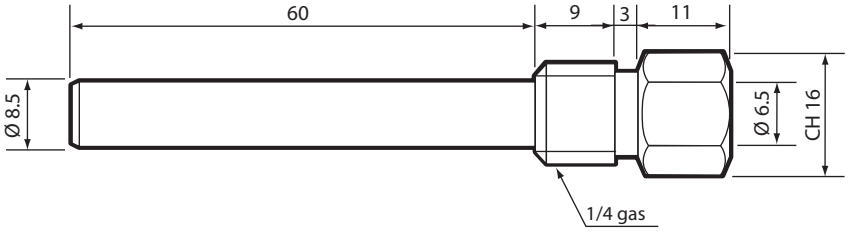

Socket 2: AISI 316 - code 1413309AXX

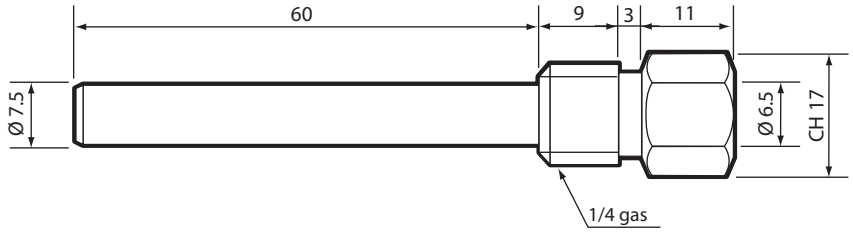

Note:

- cable secured with PG7 - IP68 cable gland applied to hexagonal end
- kit available complete with socket and cable gland

Compression fitting with metal olive - code 1309589AXX

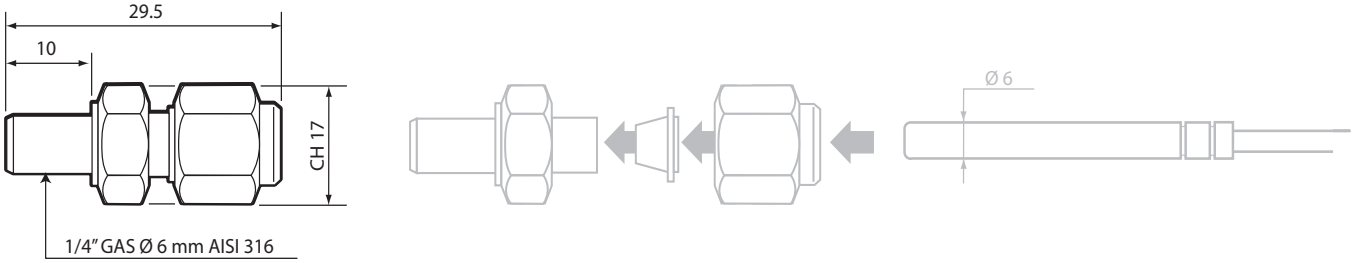

2.4 Models NTC*WH*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Dissipation factor (in air)	approx. 2.2 mW/°C
Thermal constant over time (in water)	approx. 20 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max
Sensitive element index of protection	IP68
Sensitive element housing	PP/Co with AISI 316 outer cap
Classification according to protection against electric shock (sensitive element & cable)	Supplementary insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant
Standard	NSF

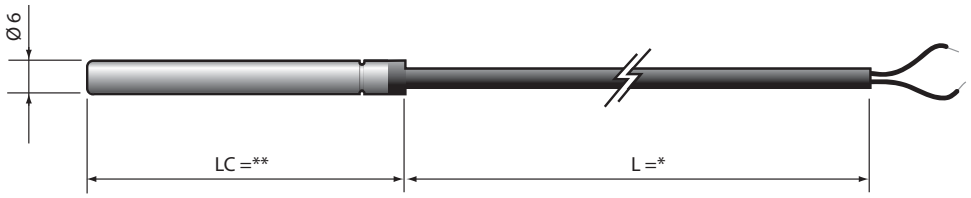

Version 1

* = see table of product codes in price list
* *= 52/100/200/300(mm dimension)

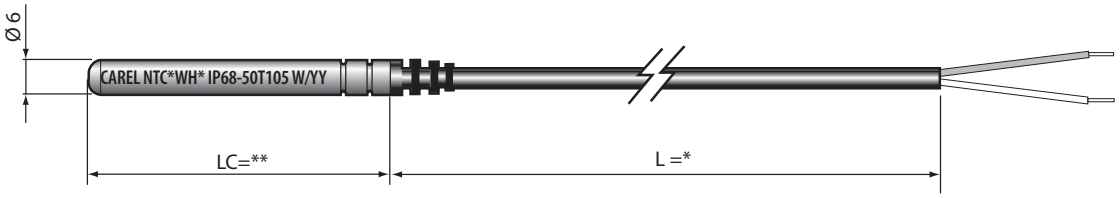

Version 2

Accessories

Socket: nickel-coated brass - 1413306AXX

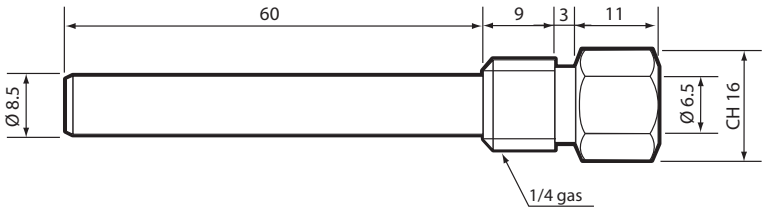

Socket 2: AISI 316 - code 1413309AXX

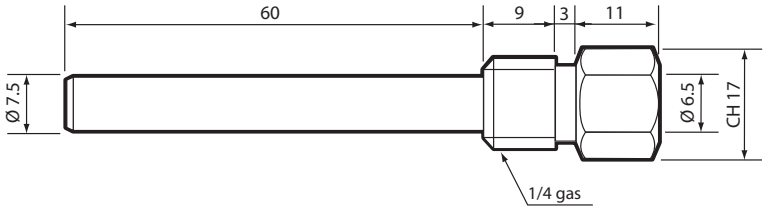

Note:

- cable secured with PG7 - IP68 cable gland applied to hexagonal end
- kit available complete with socket and cable gland

Compression fitting with metal olive - code 1309589AXX

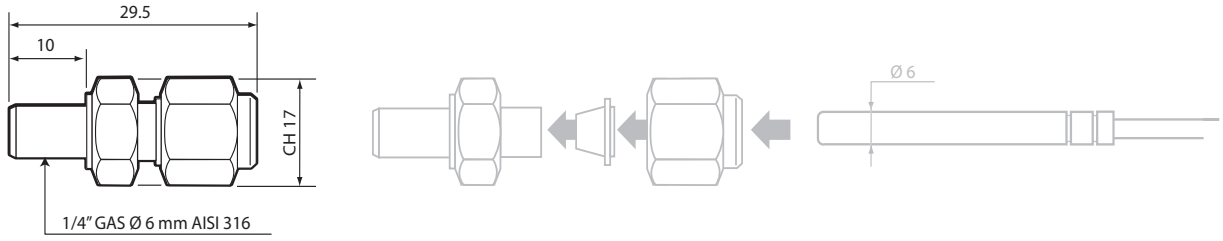

2.5 Models NTC*WG*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kΩ ±1% at 25°C Beta 3435
Dissipation factor (in air)	approx. 1 mW/°C
Thermal constant over time (in air)	approx. 10 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max.
Sensitive element index of protection	IP67 (polyurethane resin)
Sensitive element housing	Aluminium 6x6x40
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant

* = see table of product codes in price list

Cap for probe sensor

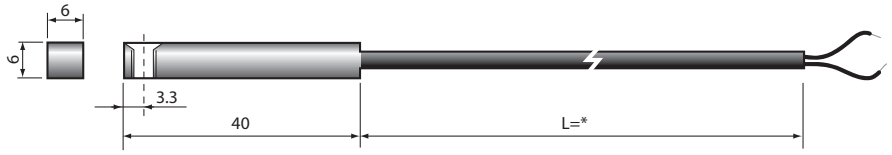

2.6 Models NTC*HT*

Storage conditions	-20T70 °C
Operating range	0T150 °C in air
Connections	Stripped ends, dimensions 6±1mm
Sensor	R(25 °C)= 50 kOhm 1%; Beta (25/85)3977±1%
Precision	+/- 0.5 °C; -10T50 °C +/- 1.0 °C; -50T85 °C +/- 1.6 °C; +85T120 °C +/- 2.1 °C; +120T150 °C
Dissipation factor (in air)	approx. 3 mW
Thermal constant over time (in air)	approx. 60 s
Cable	High temperature polyester (diam. 4x2 max.)
Sensitive element index of protection	IP55
Sensitive element housing	High temperature polyester dim. 20x5 mm (available in version with AISI 316 stainless steel cap)
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Category of resistance to heat and fire	In accordance with CEI 20-35
Insulation resistance at 1000 Vdc	>100 mOhm
Dielectric strength	1500 Vac

Note: the NTC*HT probes cannot be used with extended exposure to water and must not be used at temperatures below 0 °.

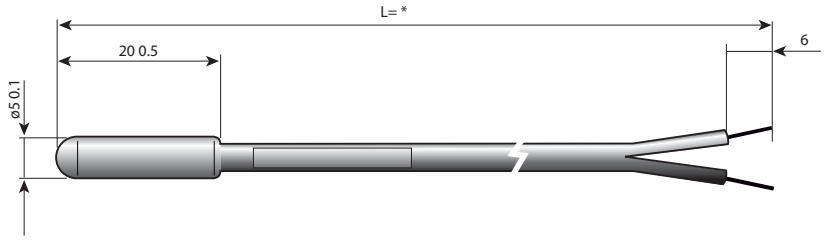

Version with stainless steel cap

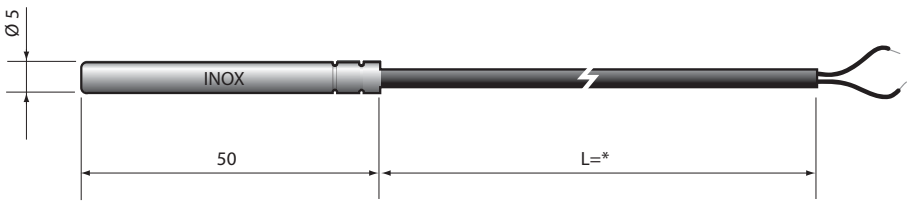

* = see table of product codes in price list

2.7 Models NTC*HF*

Storage conditions	-20T70 °C
Operating range	-50T90 °C
Connections	Stripped ends, dimensions 6±1mm
Sensor	R(25 °C)= 10 kOhm 1%; Beta 3435
Precision	+/- 0.5 °C at 25 °C; +/- 1.0 °C from -50T90 °C
Dissipation factor (in air)	3 mW
Thermal constant over time (in water)	approx. 15 s
Cable	Black, thermoplastic rubber flat cable (diam. 3.6x1.6 max.)
Sensitive element index of protection	IP67
Sensitive element housing	Thermoplastic with fastening clamp
Class. according to protection against electric shock	Basic insulation for 250 Vac
Category of resistance to heat and fire	UL/HB cable
Insulation resistance at 500 Vdc	>20 mOhm
Dielectric strength	1500 Vac

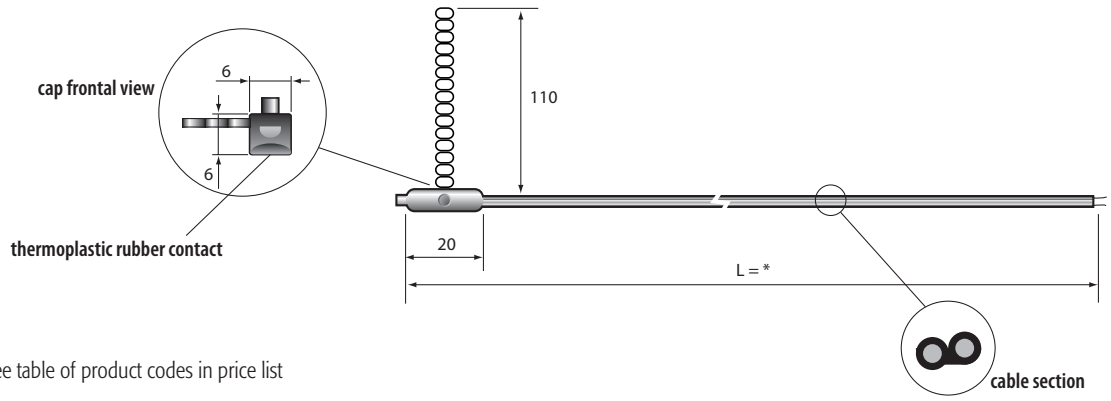

* = see table of product codes in price list

2.8 Models NTC*PS*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped and soldered ends, dimensions: 4±1 mm
Sensor	NTC 10 kΩ ±1% a 25 °C Beta 3435
Dissipation factor (in air)	2 mW/°C
Thermal constant over time (in air)	ca. / approx. 50 min (V=1 m/s)
Cable	Two-wire with double sheath, AWG22, tinned copper with resistance ≤73.9Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/co inside on wires, OD 3.30+/-0.10 mm
Sensitive element index of protection	IP67
Case	RAL7032 grey Santoprene Food safe
Classification according to protection against electric shock (sensitive element & cable)	Supplementary insulation for 250 Vac
Category of resistance to heat and fire	Flame retardant

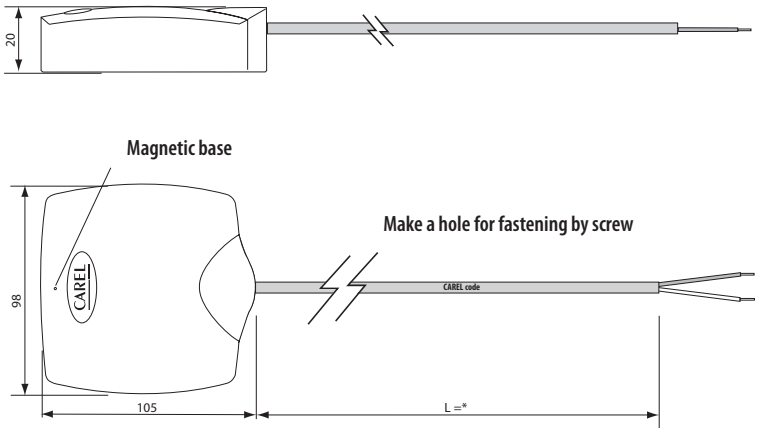

* = see table of product codes in price list

3. NTC IMMERSION PROBE TECHNICAL SPECIFICATIONS

3.1 Model TSN1300000

Immersion probes feature the sensor directly in contact with the liquid, and are installed on the tubing. Wired using the electrical connector.

Storage conditions	-20T70 °C
Operating range	-40T120 °C
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Construction	Direct immersion with connection to the 1/8" GAS male process fitting as per UNI 338
Electrical connection	4-pin co-moulded nylon, M12x1 (DIN-VDE0627) metric thread, IP67 max. temp. 90 °C
Thermal const. over time (in water)	approx. 5 s
Sensitive element housing	AISI 316
Insulation	100 Mohm at 500 Vdc
Maximum operating pressure	40 bars

1	NTC sensitive element 10 Kohm
2	Stainless steel socket
3	EX14
4	Co-moulded body
5	M12 male connector

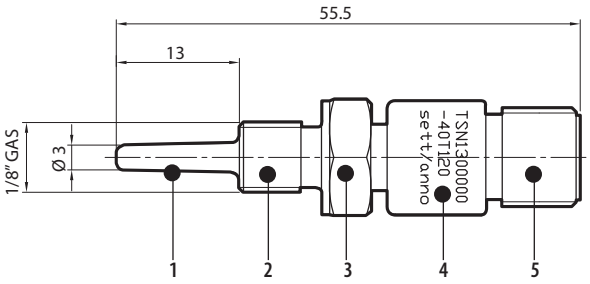

Accessories:

- 4-pin M12 connector for 1/8 GAS sensor - cable length 3 m
  Code TSOPZCW030

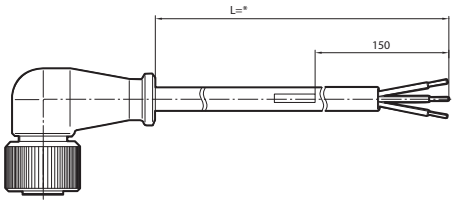

Wiring:



NTC 10kohm

1	red
2	red
3	white

- 4-pin M12 connector for 1/8 GAS sensor
  Code TSOPZCM000
  M12 connector can be assembled on site, recommended cable 3x0.2 mm² with outer sheath.





Sensor connector side view

- Probe socket 1/4 Gas
  Code TSOPZPT000

A	1/8" GAS cyl. fitting for sensor
B	1/4" GAS cyl. process fitting with immersion L= 10.5 mm

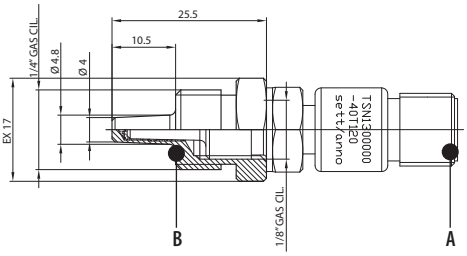

- Welding fitting
  Code TSOPZCW030

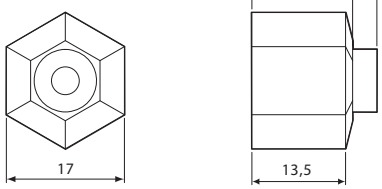

3.2 Model TSC1500030

Immersion probes feature the sensor directly in contact with the liquid and are secured to the tubing using a connector, available in the screw or weldable versions.
The body is nickel-coated brass, index of protection IP67, and the gasket (O-ring) is supplied together with the probe.

Storage conditions	-20T70 °C
Operating range	-40T90 °C
Sensor	NTC 10 kΩ ±1% at 25 °C Beta 3435
Construction	Direct immersion with connection to M14 male process fitting
Cable	2 wires AWG 22, with TPE sheath
Thermal constant over time (in water)	approx. 5 s
Sensitive element housing	Nickel-coated brass & grey PA6 co-moulded body
Insulation	100 Mohm at 100 Vdc
Maximum operating pressure	25 bar
Compatible liquids	Water, Oil

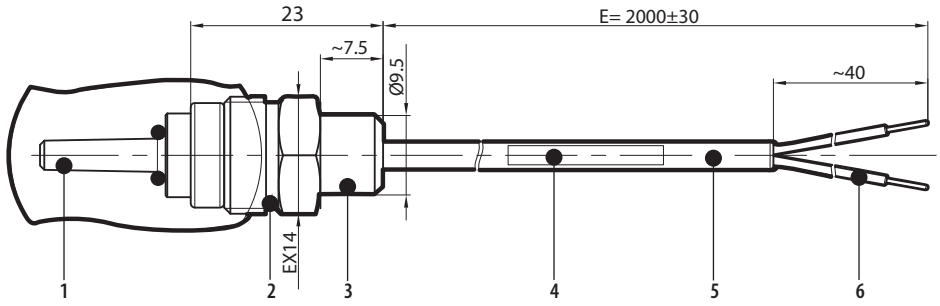

1	sensitive element
2	nickel-coated brass locking ring
3	co-moulded body
4	cable marking
5	tinned copper 2-wire cable
6	NTC sensor
7	2015 O-ring
8	nickel-coated brass thermometer socket

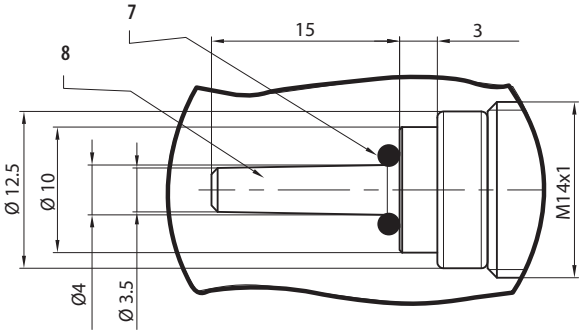

Wiring



Accessories:

Adapter from M14 to 3/8 GAS
Code TSOPZRV000

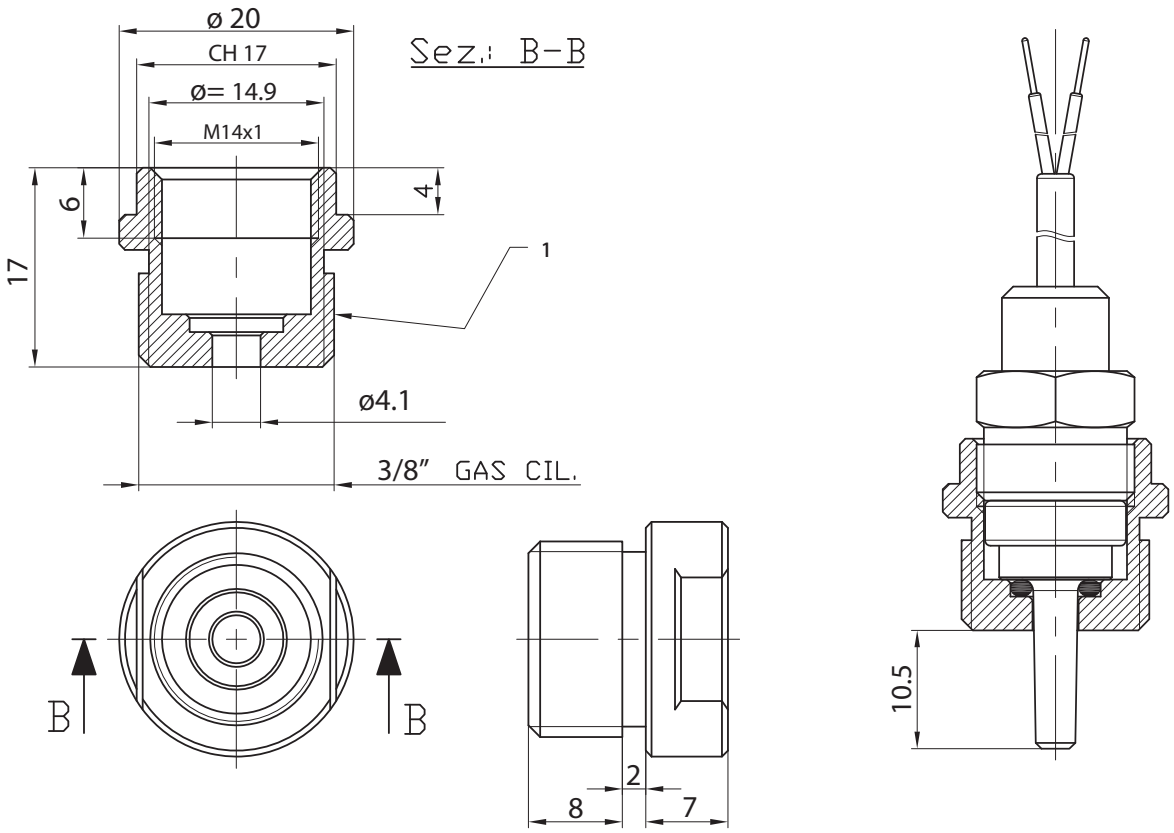

Weldable adapter for M14
Code TSOPZRS000

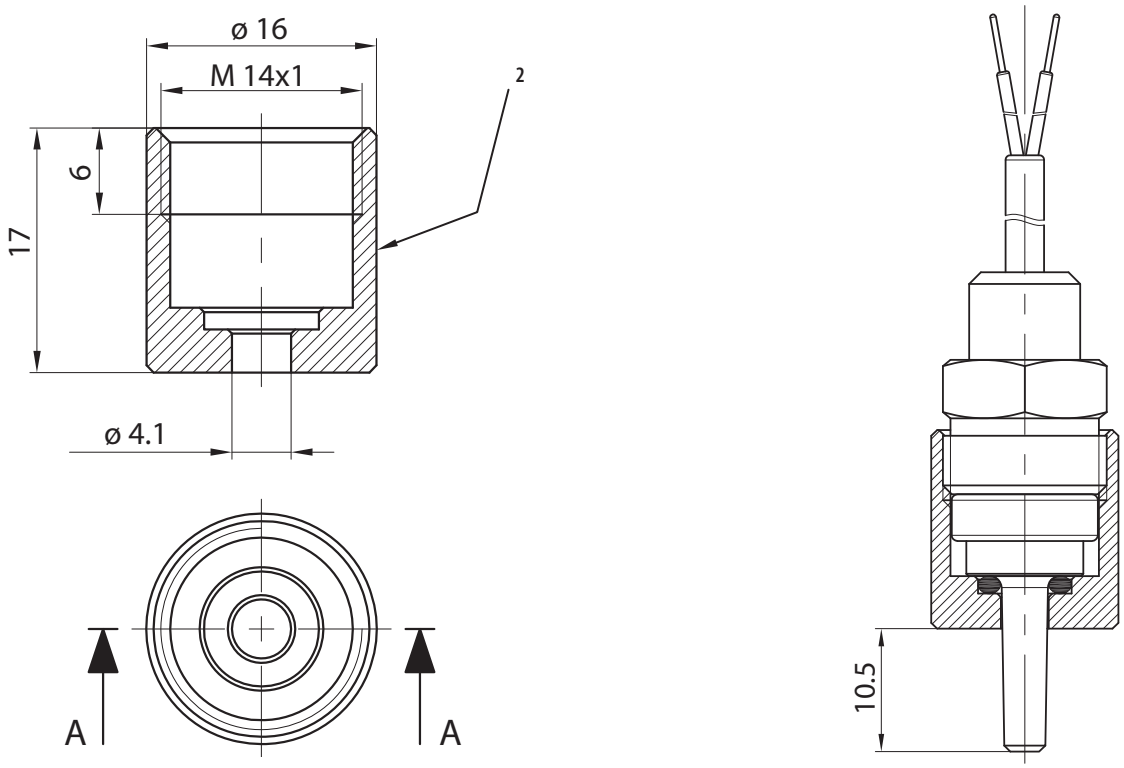

1	3/8 cyl. threaded fitting with round seat, nickel-coated brass	code: C058042A04
2	weldable cylindrical fitting with round seat, brass	code C058042A03

4. NTC PIERCING PROBE TECHNICAL SPECIFICATIONS

4.1 Models NTC*INF*

Piercing probes with "L" and "T" handle

Storage conditions	-20T70 °C
Operating range	-50T90 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	NTC 10 kOhm ±1% at 25 °C Beta 3435
Dissipation factor (in air)	approx. 2.2 mW/°C
Thermal constant over time (in air)	approx. 10 s
Cable	Two-wire with double sheath, tinned copper wire size 0.35 mm² with electrical resistance ≤63 Ohm/km
Sensitive element index of protection	IP67
Sensitive element housing	AISI 304 stainless steel with silicone resin filling
Classification according to protection against electric shock (sensitive element & cable)	Insulation: silicone both on outer sheath and inside on wires
Category of resistance to heat and fire	Flame retardant

NTCINF600*

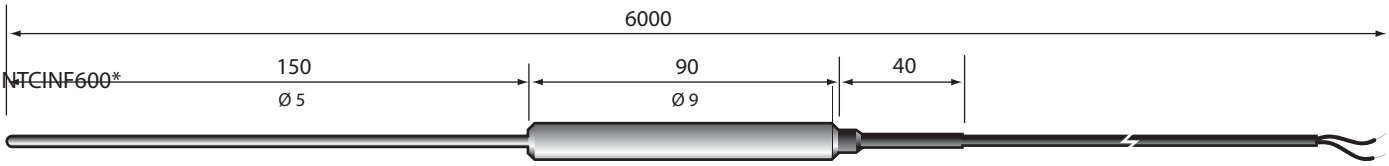

NTCINF610*

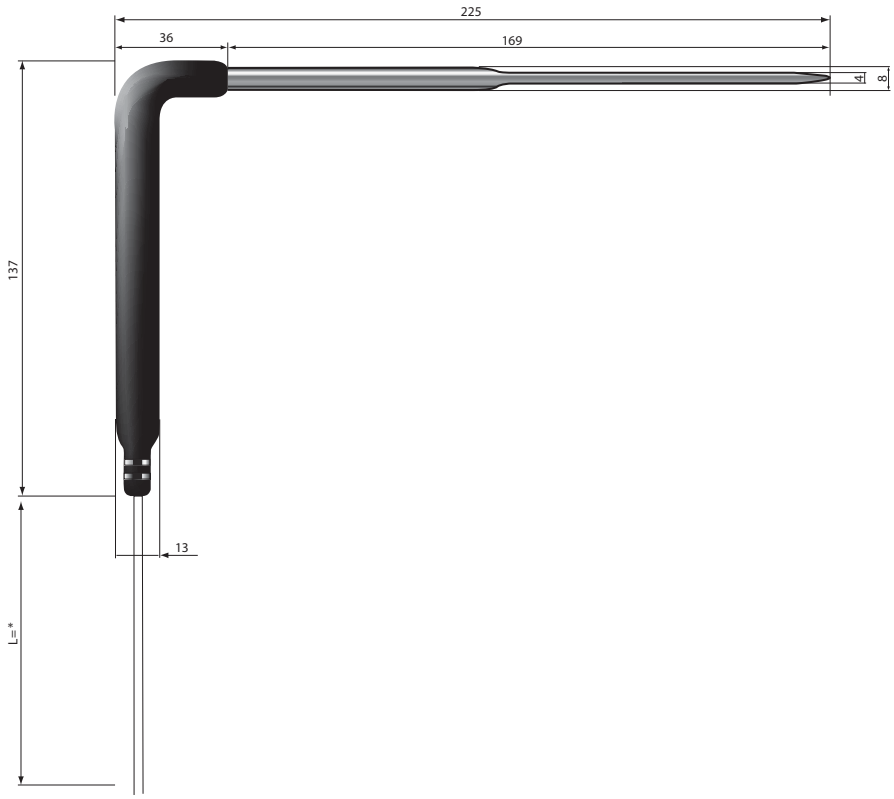

* = see table of product codes in price list

4.2 Model NTCINF0340

Piercing probe with "L" handle and heating system

Storage conditions	-20T70 °C
Operating range	-50T90 °C
Connections	Stripped ends, with terminals
Sensor	NTC 10 kOhm ±1% at 25 °C Beta 3435
Thermal constant over time (in water)	approx. 10 s
Cable	Food-safe thermoplastic sheath with 4 wires size 0.15 mm^2
Wire colours	White-black, NTC / red, electric heater.
Maximum heater voltage	24 Vac
Electrical resistance of heater	7 Ohm ±0.6
Cable length	3 m
Sensitive element index of protection	IP67
Sensitive element housing	AISI 316 stainless steel. Length 100 mm diam. 4 mm. With pointed tip.
Cap filler	Aluminium
Classification according to protection against electric shock (sensitive element & cable)	Insulation: Outer sheath, and inside on wires
Category of resistance to heat and fire	Flame retardant
Insulation resistance	20 Mohm 500 Vdc
Dielectric strength	500 Vac

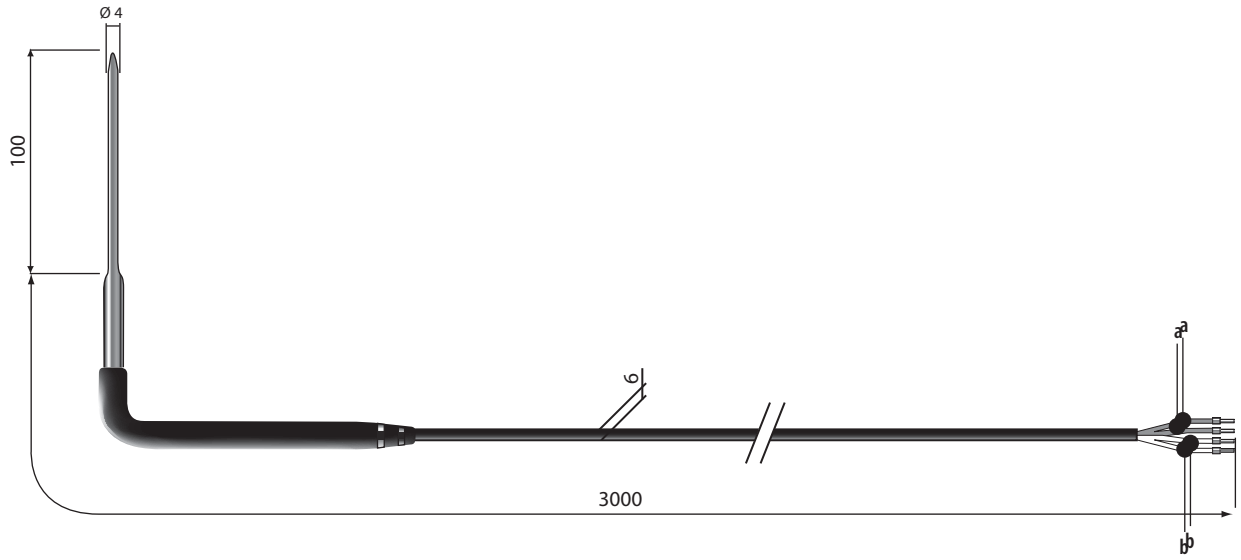

a	red, electric heater
b	white/black, NTC

5. TABLE OF TEMPERATURE VALUES

Table of temperature-resistance values for NTC sensor 10K@25°C ß 3435

Temp.	Resistance value		
	Max.	Typical	Min.
°C	KΩ	KΩ	KΩ
-50	344,60	329,50	314,90
-49	325,00	310,90	297,30
-48	306,60	293,50	280,90
-47	289,40	277,20	265,40
-46	273,40	262,00	251,00
-45	258,30	247,70	237,40
-44	244,20	234,30	224,70
-43	231,00	221,70	212,80
-42	218,60	209,90	201,60
-41	207,00	198,90	191,00
-40	196,00	188,50	181,10
-39	185,50	178,50	171,60
-38	175,60	169,00	162,60
-37	166,30	160,20	154,20
-36	157,60	151,90	146,30
-35	149,40	144,10	138,80
-34	141,70	136,70	131,80
-33	134,50	129,80	125,20
-32	127,70	123,30	119,00
-31	121,20	117,10	113,10
-30	115,20	111,30	107,50
-29	109,40	105,70	102,20
-28	103,90	100,50	97,20
-27	98,68	95,52	92,45
-26	93,80	90,84	87,97
-25	89,20	86,43	83,73
-24	84,85	82,26	79,74
-23	80,76	78,33	75,96
-22	76,89	74,61	72,39
-21	73,23	71,10	69,01
-20	69,77	67,77	65,82
-19	66,44	64,57	62,74
-18	63,30	61,54	59,83
-17	60,32	58,68	57,07
-16	57,51	55,97	54,46
-15	54,85	53,41	51,99
-14	52,33	50,98	49,65
-13	49,95	48,68	47,43
-12	47,69	46,50	45,32
-11	45,55	44,43	43,33
-10	43,52	42,47	41,43
-9	41,55	40,57	39,60
-8	39,69	38,77	37,86
-7	37,92	37,06	36,21
-6	36,25	35,44	34,64
-5	34,66	33,90	33,15
-4	33,15	32,44	31,73
-3	31,72	31,05	30,39
-2	30,36	29,73	29,11
-1	29,06	28,48	27,89
0	27,83	27,28	26,74

Temp.	Resistance value		
	Max.	Typical	Min.
°C	KΩ	KΩ	KΩ
1	26,65	26,13	25,62
2	25,52	25,03	24,55
3	24,44	23,99	23,54
4	23,42	23,00	22,57
5	22,45	22,05	21,66
6	21,53	21,15	20,78
7	20,64	20,30	19,95
8	19,81	19,48	19,15
9	19,01	18,70	18,39
10	18,25	17,96	17,67
11	17,51	17,24	16,97
12	16,81	16,56	16,30
13	16,14	15,90	15,67
14	15,50	15,28	15,06
15	14,89	14,69	14,48
16	14,31	14,12	13,92
17	13,75	13,58	13,39
18	13,22	13,06	12,89
19	12,72	12,56	12,40
20	12,24	12,09	11,94
21	11,77	11,63	11,50
22	11,32	11,20	11,07
23	10,90	10,78	10,66
24	10,49	10,38	10,27
25	10,10	10,00	9,90
26	9,73	9,63	9,53
27	9,38	9,28	9,18
28	9,04	8,94	8,84
29	8,72	8,62	8,52
30	8,41	8,31	8,21
31	8,11	8,01	7,92
32	7,83	7,73	7,63
33	7,55	7,45	7,36
34	7,29	7,19	7,10
35	7,04	6,94	6,85
36	6,79	6,70	6,61
37	6,56	6,47	6,37
38	6,34	6,25	6,15
39	6,12	6,03	5,94
40	5,92	5,83	5,74
41	5,72	5,63	5,54
42	5,53	5,44	5,35
43	5,34	5,26	5,17
44	5,17	5,08	4,99
45	5,00	4,91	4,83
46	4,83	4,75	4,67
47	4,68	4,59	4,51
48	4,52	4,44	4,36
49	4,38	4,30	4,22
50	4,24	4,16	4,08
51	4,10	4,03	3,95
52	3,97	3,90	3,82
53	3,85	3,77	3,70
54	3,73	3,65	3,58
55	3,61	3,54	3,46

Temp.	Resistance value		
	Max.	Typical	Min.
°C	KΩ	KΩ	KΩ
56	3,50	3,43	3,35
57	3,39	3,32	3,25
58	3,28	3,22	3,15
59	3,18	3,12	3,05
60	3,09	3,02	2,95
61	2,99	2,93	2,86
62	2,90	2,84	2,77
63	2,82	2,75	2,69
64	2,73	2,67	2,61
65	2,65	2,59	2,53
66	2,57	2,51	2,45
67	2,50	2,44	2,38
68	2,42	2,36	2,31
69	2,35	2,30	2,24
70	2,28	2,23	2,17
71	2,22	2,16	2,11
72	2,15	2,10	2,05
73	2,09	2,04	1,99
74	2,03	1,98	1,93
75	1,98	1,92	1,87
76	1,92	1,87	1,82
77	1,87	1,82	1,77
78	1,81	1,77	1,72
79	1,76	1,72	1,67
80	1,72	1,67	1,62
81	1,67	1,62	1,58
82	1,62	1,58	1,53
83	1,58	1,53	1,49
84	1,54	1,49	1,45
85	1,49	1,45	1,41
86	1,45	1,41	1,37
87	1,42	1,37	1,33
88	1,38	1,34	1,30
89	1,34	1,30	1,26
90	1,31	1,27	1,23
91	1,27	1,23	1,19
92	1,24	1,20	1,16
93	1,21	1,17	1,13
94	1,17	1,14	1,10
95	1,14	1,11	1,07
96	1,12	1,08	1,04
97	1,09	1,05	1,02
98	1,06	1,02	0,99
99	1,03	1,00	0,97
100	1,01	0,97	0,94
101	0,98	0,95	0,92
102	0,96	0,92	0,89
103	0,93	0,90	0,87
104	0,91	0,88	0,85
105	0,89	0,86	0,83
106	0,87	0,84	0,81
107	0,84	0,82	0,79
108	0,82	0,80	0,77
109	0,80	0,78	0,75
110	0,79	0,76	0,73

Table of temperature-resistance values for NTC sensor 50K@25°C ß 3977

Temperature	Typical resistance	TCR	Min. resistance value	Max. resistance value	% Tolerance		°C Tolerance	
°C	KΩ	%/°C	KΩ	KΩ	Min.	Max.	Min.	Max.
-40	1630.77	-6.623	1559.17	1705.49	-4.39	4.58	0.66	-0.69
-35	1178.11	-6.385	1130.05	1228.08	-4.08	4.24	0.64	-0.66
-30	860.97	-6.161	828.44	894.68	-3.78	3.92	0.61	-0.64
-25	636.08	-5.950	613.91	658.99	-3.49	3.60	0.59	-0.61
-20	474.78	-5.751	459.57	490.44	-3.20	3.30	0.56	-0.57
-15	357.83	-5.562	347.35	368.59	-2.93	3.01	0.53	-0.54
-10	272.18	-5.384	264.93	279.59	-2.66	2.73	0.49	-0.51
-5	208.83	-5.214	203.81	213.96	-2.41	2.45	0.46	-0.47
0	161.56	-5.053	158.08	165.10	-2.15	2.19	0.43	-0.43
5	125.97	-4.900	123.56	128.41	-1.91	1.94	0.39	-0.40
10	98.96	-4.755	97.30	100.63	-1.67	1.69	0.35	-0.36
15	78.29	-4.616	77.16	79.43	-1.44	1.45	0.31	-0.31
20	62.37	-4.483	61.61	63.13	-1.22	1.22	0.27	-0.27
25	50.00	-4.357	49.50	50.50	-1.00	1.00	0.23	-0.23
30	40.34	-4.236	39.85	40.83	-1.21	1.22	0.29	-0.29
35	32.73	-4.120	32.27	33.20	-1.42	1.43	0.34	-0.35
40	26.71	-4.009	26.28	27.15	-1.62	1.64	0.40	-0.41
45	21.92	-3.903	21.52	22.32	-1.81	1.84	0.46	-0.47
50	18.08	-3.801	17.72	18.45	-2.00	2.03	0.53	-0.53
55	14.99	-3.704	14.66	15.32	-2.19	2.22	0.59	-0.60
60	12.48	-3.610	12.19	12.78	-2.36	2.41	0.65	-0.67
65	10.44	-3.519	10.18	10.72	-2.54	2.59	0.72	-0.74
70	8.78	-3.433	8.54	9.02	-2.71	2.77	0.79	-0.81
75	7.41	-3.349	7.20	7.63	-2.87	2.95	0.86	-0.88
80	6.28	-3.269	6.09	6.48	-3.03	3.12	0.93	-0.95
85	5.34	-3.191	5.17	5.52	-3.19	3.28	1.00	-1.03
90	4.56	-3.117	4.41	4.72	-3.34	3.45	1.07	-1.11
95	3.91	-3.045	3.78	4.05	-3.49	3.61	1.15	-1.18
100	3.37	-2.975	3.24	3.49	-3.64	3.76	1.22	-1.26
105	2.91	-2.908	2.80	3.02	-3.78	3.92	1.30	-1.35
110	2.52	-2.843	2.42	2.62	-3.92	4.06	1.38	-1.43
115	2.19	-2.781	2.10	2.28	-4.05	4.21	1.46	-1.51
120	1.91	-2.720	1.83	1.99	-4.18	4.35	1.54	-1.60
125	1.67	-2.662	1.59	1.74	-4.31	4.50	1.62	-1.69
130	1.46	-2.605	1.40	1.53	-4.44	4.63	1.70	-1.78
135	1.28	-2.551	1.22	1.34	-4.56	4.77	1.79	-1.87
140	1.13	-2.498	1.08	1.19	-4.68	4.90	1.87	-1.96
145	1.00	-2.446	0.95	1.05	-4.80	5.03	1.96	-2.06
150	0.89	-2.396	0.84	0.93	-4.91	5.16	2.05	-2.15

6. PT100 PROBE TECHNICAL SPECIFICATIONS

6.1 Models PT100

Probe with fastening clamp

Storage conditions	-20T70 °C
Sensitive element operating range	PT100000A1: -50 °C to +250 °C PT100000A2 : -50 °C to +400 °C
Sensor	Pt100 Class B in accordance with DIN IEC751, 3 wire
Precision	+/- class B=(0.005xt)+0.3, a 100 °C = ±0.8 °C
Power and output connections	Stripped ends, dimensions 6±1mm
Cable	PT100000A1: silicone rubber HALOGEN COMPOUNDS ≤ 1.1 x 10-3 mg/g PT100000A2: 3x0.5 mm^2 fibreglass wire and secondary insulation
Dissipation factor (in air)	0.3 K/mW at 0 °C
Thermal constant over time (in air)	R0-drift 0.004 % after 1000h at 500 °C
Category of resistance to heat and fire	Range -20 °C +200 °C for PT100000A1, +500 °C for PT100000A2
Insulation resistance	>500 Mohm / 250 V
Dielectric strength	250 Vac (code PT100000A1 only) not applicabie for PT100000A2
Primary insulation (porbe and cable)	250 Vac
Sensitive element index of protection	IP65
Sensitive element housing	AISI 316 stainless steel

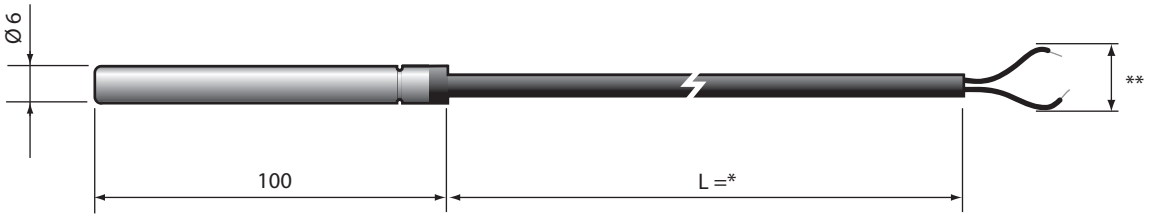

* = see table of product codes in price list
**= the sensor may have 2 or 3 wires

7. TABLE OF TEMPERATURE VALUES PT100 PROBE

7.1 Table of temperature values PT100 Probe Class B

R (0) = 100,00 Ω α = 0,003 850 1/°C

°C	0	1	2	3	4	5	6	7	8	9	10	°C
- 200	IB,49											- 200
-190	22,80	22,37	21,94	21,51	21,08	20,65	20,22	19,79	19,36	18,93	18,49	-190
- I80	27,08	26,65	26,23	25,80	25,37	24,94	24,52	24,09	23,66	23,23	22,80	- I80
- 170	31,32	30,90	30,47	30,05	29,63	29,20	28,78	28,35	27,93	27,50	27,08	- 170
-160	35,53	35,11	34,69	34,27	33,85	33,43	33,01	32,59	32,16	31,74	31,32	-160
-150	39,71	39,30	38,88	38,46	38,04	37,63	37,21	36,79	36,37	35,95	35,53	-150
-140	43,87	43,45	43,04	42,63	42,21	41,79	41,38	40,96	40,55	40,13	39,71	-140
-130	48,00	47,59	47,18	46,76	46,35	45,94	45,52	45,11	44,70	44,28	43,87	-130
-120	52,11	51,70	51,29	50,88	50,47	50,06	49,64	49,23	48,82	48,41	48,00	-120
-110	56,19	55,78	55,38	54,97	54,56	54,15	53,74	53,33	52,92	52,52	52,11	-110
-100	60,25	59,85	59,44	59,04	58,63	58,22	57,82	57,41	57,00	56,60	56,19	-100
-90	64,30	63,90	63,49	63,09	62,68	62,28	61,87	61,47	61,06	60,66	60,25	-90
-80	68,33	37,92	67,52	67,12	66,72	66,31	65,91	65,51	65,11	64,70	64,30	-80
-70	72,33	71,93	71,53	71,13	70,73	70,33	69,93	69,53	69,13	68,73	68,33	-70
-60	76,33	75,93	75,53	75,13	74,73	74,33	73,93	73,53	73,13	72,73	72,33	-60
-50	80,31	79,91	79,51	79,11	78,72	78,32	77,92	77,52	77,13	76,73	76,33	-50
-40	84,27	83,88	83,48	83,08	82,69	82,29	81,89	51,50	81,10	80,70	80,31	-40
-30	88,22	87,83	87,43	87,04	86,64	86,25	85,85	85,46	85,06	84,67	84,27	-30
-20	92,16	91,77	91,37	90,98	90,59	90,19	89,80	89,40	89,01	88,62	88,22	-20
-10	96,09	95,69	95,30	94,91	94,52	94,12	93,73	93,34	92,95	92,55	92,16	-10
0	100,00	99,61	99,22	98,83	98,44	98,04	97,65	97,26	96,87	96,48	96,09	0
0	100,00	100,390	100,78	101,17	101,56	101,95	102,34	102,73	103,12	103,51	103,90	0
10	103,90	104,29	104,68	105,07	105,46	105,85	106,24	106,63	107,02	107,40	107,79	10
20	107,79	108,18	108,57	108,96	109,35	109,73	110,12	110,51	110,90	111,28	111,67	20
30	111,67	112,06	112,45	112,83	113,22	113,61	113,99	114,38	114,77	115,15	115,54	30
40	115,54	115,93	116,31	116,70	117,08	117,47	117,85	118,24	118,62	119,01	119,40	40
50	119,40	119,78	120,16	120,55	120,93	121,32	121,70	122,09	122,47	122,86	123,24	50
60	123,24	123,62	124,01	124,39	124,77	125,16	125,54	125,92	123,31	126,69	127,07	60
70	127,07	127,45	127,84	128,22	128,60	128,98	129,37	129,75	130,13	130,51	130,89	70
80	130,89	131,27	131,66	132,04	132,42	132,80	133,18	133,56	133,94	134,32	134,70	80
90	134,70	135,08	135,46	135,84	136,22	136,60	136,98	137,36	137,74	138,12	138,50	90
100	138,50	138,88	139,26	139,64	140,02	140,39	140,77	141,15	141,53	141,91	142,29	100
110	142,29	142,66	143,04	143,42	143,80	144,17	144,55	144,93	145,31	145,68	146,06	110
120	146,06	146,44	146,81	147,19	147,57	147,94	148,32	148,70	149,07	149,45	149,82	120
130	149,82	150,20	150,57	150,95	151,33	151,70	152,08	152,45	152,83	153,20	153,58	130
140	153,58	153,95	154,32	154,70	155,07	155,45	155,82	156,19	156,57	156,94	157,31	140
150	157,31	157,69	158,06	158,43	158,81	159,18	159,55	159,93	160,30	160,67	161,04	150
160	161,04	161,42	161,79	162,16	162,53	162,90	163,27	163,65	164,02	164,39	164,76	160
170	164,76	165,13	165,50	165,87	166,24	166,61	166,98	167,35	167,72	168,09	168,46	170
180	168,46	168,83	169,20	169,57	169,94	170,31	170,68	171,05	171,42	171,79	172,16	180
190	172,16	172,53	172,90	173,26	173,63	174,00	174,37	174,74	175,10	175,47	175,84	190
200	175,84	176,21	176,57	176,94	177,31	177,68	178,04	178,41	178,78	179,14	179,51	200
210	179,51	179,88	180,24	180,61	180,97	181,34	181,71	182,07	182,44	182,80	183,17	210
220	183,17	183,53	183,90	184,26	184,63	184,99	185,36	185,72	186,09	186,45	186,82	220
230	186,82	187,18	187,54	187,91	188,27	188,63	189,00	189,36	189,72	190,09	190,45	230
240	190,45	190,81	191,18	191,54	191,90	192,26	192,63	192,99	193,35	193,71	194,07	240
250	194,07	194,44	194,80	195,16	195,52	195,88	196,24	196,60	196,96	197,33	197,69	250
260	197,69	198,05	198,41	198,77	199,13	199,49	199,85	200,21	200,57	200,93	201,29	260
270	201,29	201,65	202,01	202,36	202,72	203,08	203,44	203,80	204,16	204,52	204,88	270
280	204,88	205,23	205,59	205,95	206,31	206,67	207,02	207,38	207,74	208,10	208,45	280
290	208,45	208,81	209,17	209,52	209,88	210,24	210,59	210,95	211,31	211,66	212,02	290
300	212,02	212,37	212,73	213,09	213,44	213,80	214,15	214,51	214,86	215,22	215,57	300
310	215,57	215,93	216,28	216,64	216,99	217,35	217,70	218,05	218,41	218,76	219,12	310
320	219,12	219,47	219,82	220,18	220,53	220,88	221,24	221,59	221,94	222,29	222,65	320

8. PT1000 PROBE TECHNICAL SPECIFICATIONS

8.1 Models PT1*HP*

Storage conditions	-20T70 °C
Operating range	-50T105 °C in air
	-50T50 °C in fluid
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	Pt1000 - Class B
Dissipation factor (in air)	approx. 3 mW/°C
Thermal constant over time (in air)	ca. / approx. 75 s
Cable	Black two-wire flat cable, with tinned copper wire size 0.3 mm^2
Sensitive element index of protection	IP67
Sensitive element housing	Polyolefin
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Category of resistance to heat and fire	Flame retardant

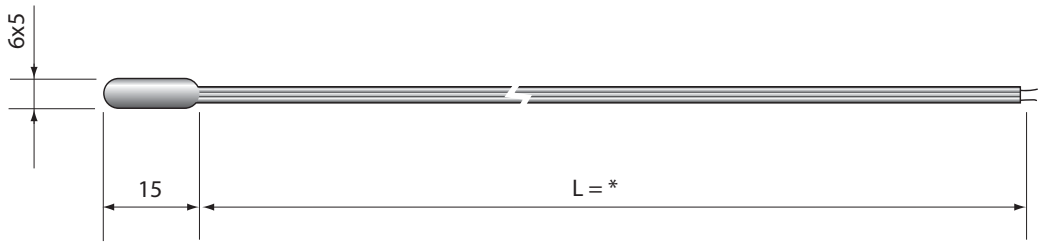

* = see table of product codes in price list

8.2 Models PT1*WF*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	Pt1000 - Class B
Dissipation factor (in air)	approx. 7 mW/°C
Thermal constant over time (in water)	approx. 4.5 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max.
Sensitive element index of protection	IP67
Sensitive element housing	AISI 316 steel diameter 4 mm - L= 30 mm
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant

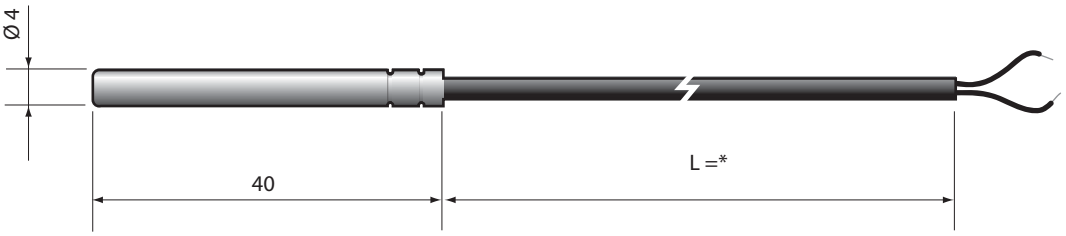

* = see table of product codes in price list

8.3 Models PT1*WP*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped ends, dimensions: 5±1 mm
Sensor	Pt1000 - Class B
Dissipation factor (in air)	approx. 2.2 mW/°C
Thermal constant over time (in water)	approx. 10 s
Cable	Two-wire with double sheath, AWG22, tinned copper with electrical resistance ≤63 Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/Co inside on wires, OD 3.5 mm max
Sensitive element index of protection	IP68 Immersion in water 1 m depth for 200 h at 70 °C Resistance in autoclave to saturated steam 30 min. at 105 °C
Sensitive element housing	PP/Co with AISI 316 outer cap
Classification according to protection against electric shock (sensitive element & cable)	Supplementary insulation for 250 Vac;
Category of resistance to heat and fire	Flame retardant

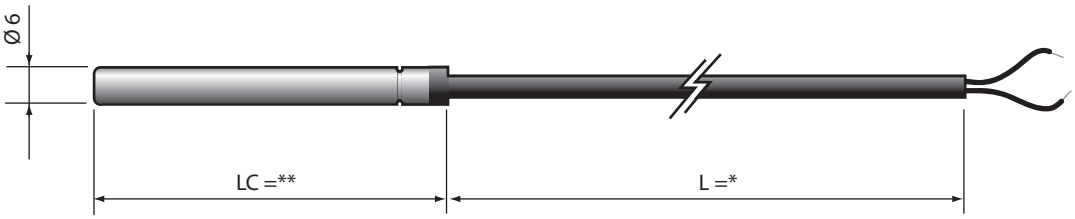

* = see table of product codes in price list

Accessories

Socket: nickel-coated brass - 1413306AXX

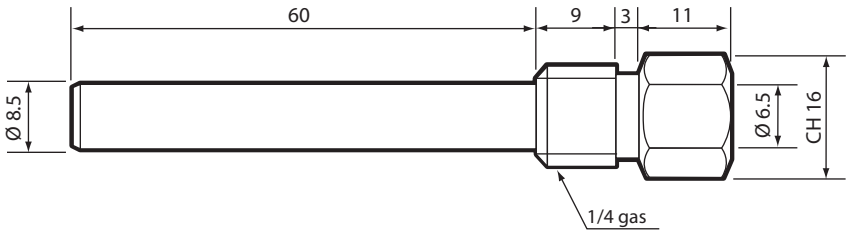

Socket 2: AISI 316 - code 1413309AXX

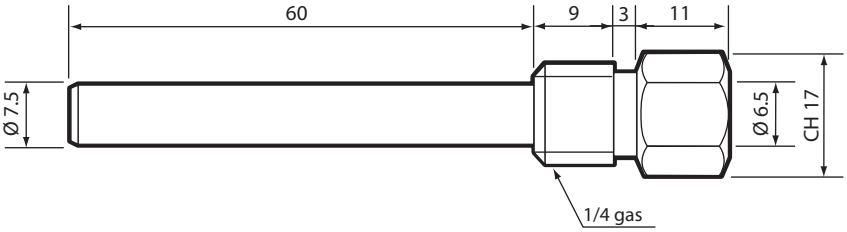

Note:

- cable secured with PG7 - IP68 cable gland applied to hexagonal end
- kit available complete with socket and cable gland

Compression fitting with metal olive - code 1309589AXX

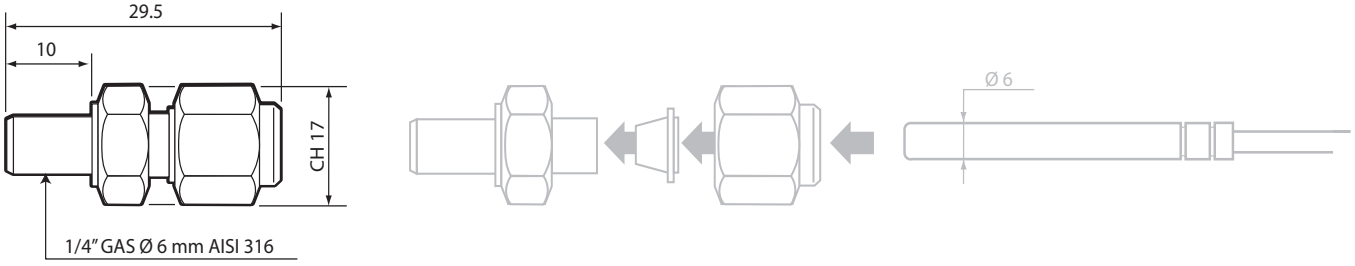

8.4 PT1*HT* Models

Storage conditions	-20T70 °C
Operating range	-50T250 °C
Connections	with crimped metal terminals
Sensor	Pt1000 - Class B (2 wires)
Dissipation factor (in air)	ca. / approx. 7 mW/°C
Thermal constant over time (in water)	ca. / approx.20 s (V=2m/s)
Cable	White Teflon with two cables red and white Section. 2x0.22 mm^2 Ø3 mm
Sensitive element index of protection	IP67
Sensitive element housing	Silicone resin
Cap material	Stainless steel Aisi 304
Dimension cap	6x40 mm
Classification according to protection against electric shock (sensitive element & cable)	additional insulation
Category of resistance to heat and fire	Flame retardant
Isolation resistance	20 Mohm 500 Vcc
Dielectric rigidity	2000Vac

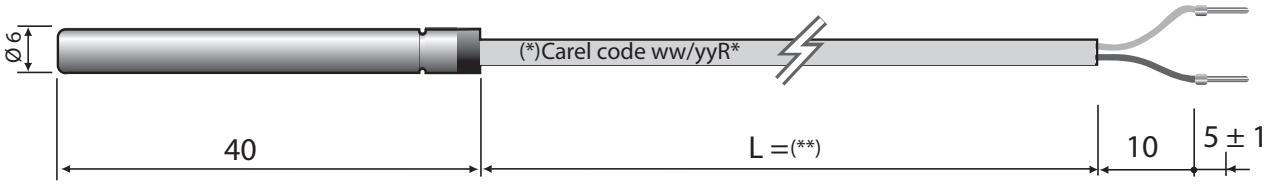

Notes:
(*) ww/yyR*:
ww = week of production;
yy = year of production;
R* = Revision.
(**) see table of product codes in price list

8.5 Models PT1*HF

Probe with fastening clamp

Storage conditions	-20T70 °C
Sensitive element operating range	-50T105 °C
Connections	Stripped ends, dimensions 6±1mm
Sensor	Pt1000 Class B
Precision	+/- 0.8 °C; -50T90 °C
Dissipation factor (in air)	3 mW
Thermal constant over time (in air)	approx. 15 s
Cable	Black thermoplastic rubber flat cable (diam. 3.6x1.6 max.)
Sensitive element index of protection	IP67
Sensitive element housing	Thermoplastic with fastening clamp
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Category of resistance to heat and fire	UL/HB cable
Insulation resistance at 1000 Vdc	>20 Mohm
Dielectric strength	1500 Vac

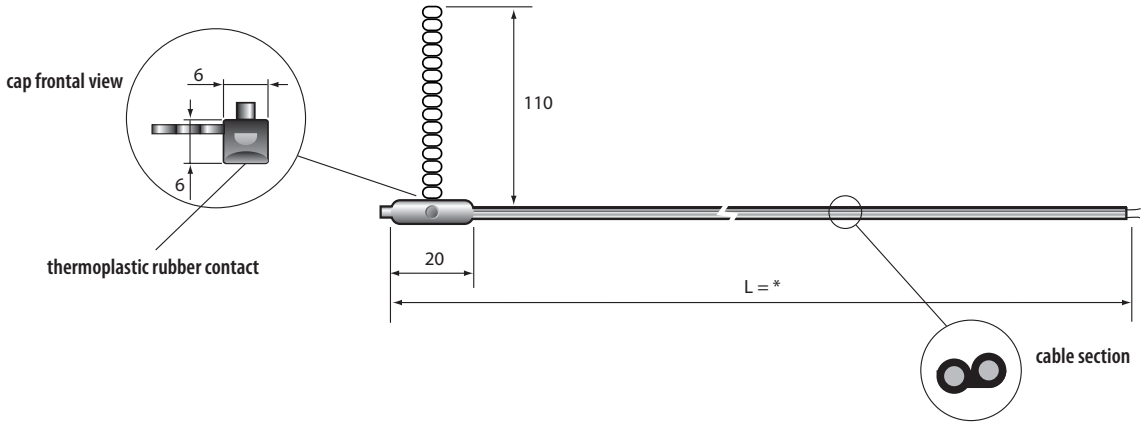

* = see table of product codes in price list

8.6 Models PT1*PS*

Storage conditions	-20T70 °C
Operating range	-50T105 °C
Connections	Stripped and soldered ends, dimensions: 4±1 mm
Sensor	Pt1000 Class B
Dissipation factor (in air)	2 mW/°C
Thermal constant over time (in air)	approx. 50 min (V=1 m/s)
Cable	Two-wire with double sheath, AWG22, tinned copper with resistance ≤73.9Ω/km - Insulation: TPE specific for immersion in water on outer sheath, PP/co inside on wires, OD 3.30+/-0.10 mm
Sensitive element index of protection	IP67
Case	RAL7032 grey Santoprene Food safe
Classification according to protection against electric shock (sensitive element & cable)	Supplementary insulation for 250 Vac
Category of resistance to heat and fire	Flame retardant

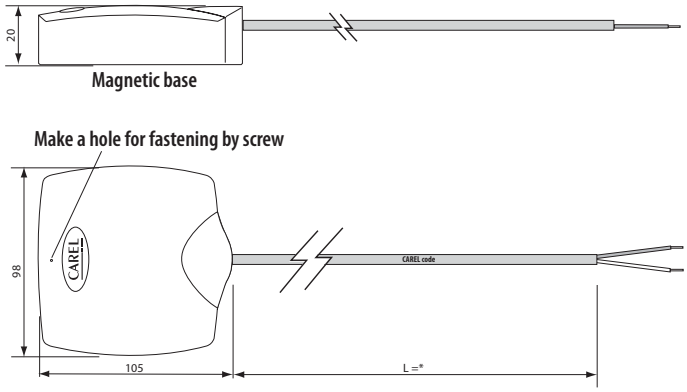

* = see table of product codes in price list

9. PT1000 IMMERSION PROBE TECHNICAL SPECIFICATIONS

9.1 Model TST1300000

Immersion probes feature the sensor directly in contact with the liquid, and are installed on the tubing. Wired using the electrical connector.

Storage conditions	-20T70 °C
Operating range	-40T120 °C
Sensor	Pt1000 Class B
Construction	Direct immersion with connection to the 1/8" GAS male process fitting as per UNI 338
Electrical connection	4-pin co-moulded nylon, M12x1 (DIN-VDE0627) metric thread, IP67 max. temp. 90°C
Thermal constant over time (in water)	approx. 5 s
Sensitive element housing	AISI 316
Insulation	100 Mohm a 500 Vdc
Maximum operating pressure	40 bar

1	sensitive element NTC 10 Kohm
2	stainless steel socket
3	EX14
4	co-moulded body
5	M12 male connector

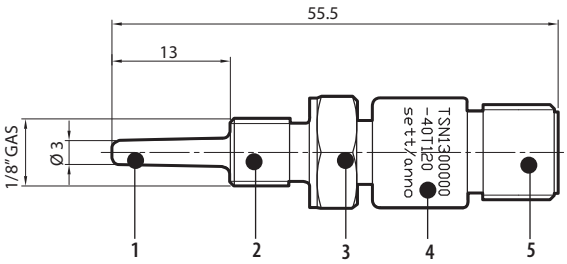

Accessories:

- 4-pin M12 connector for 1/8 GAS sensor - cable length 3 m
  Code TSOPZCW030

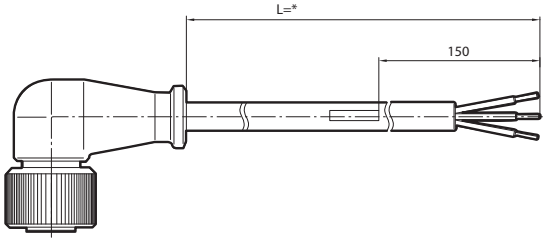

Wiring:



PT1000

1	red
2	red
3	white

- 4-pin M12 connector for 1/8 GAS sensor
  Code TSOPZCM000
  M12 connector can be assembled on site, recommended cable 3x0.2 mm^2 with outer sheath.





Note: the three-wire connection for the Pt100 must be used when the controller is fitted accordingly. If not, the ends are to be connected together on the same terminal.

Sensor connector side view

A	Compact thermistor with 1/8" GAS cyl. fitting
B	1/4" GAS cyl. process fitting with immersion L= 10.5 mm

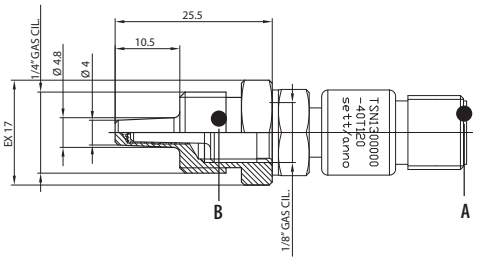

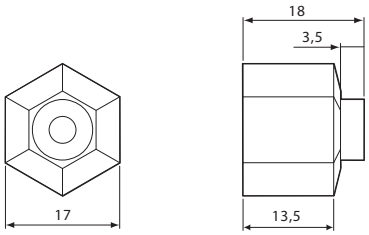

9.2 Model TSM1500B30

Immersion probes feature the sensor directly in contact with the liquid and are secured to the tubing using a connector, available in the screw or weldable versions.
The body is nickel-coated brass, index of protection IP67, and the gasket (O-ring) is supplied together with the probe.

Storage conditions	-20T70 °C
Operating range	-40T90 °C
Sensor	Pt1000 Class B
Construction	Direct immersion with connection to M14 male process fitting
Cable	2 wires AWG 22, with TPE sheath
Thermal constant over time (in water)	approx. 5 s
Sensitive element housing	Nickel-coated brass & PA6 gray co-moulded body
Insulation	100 Mohm at 100 Vdc
Maximum operating pressure	25 bar
Compatible liquids	Water, Oil

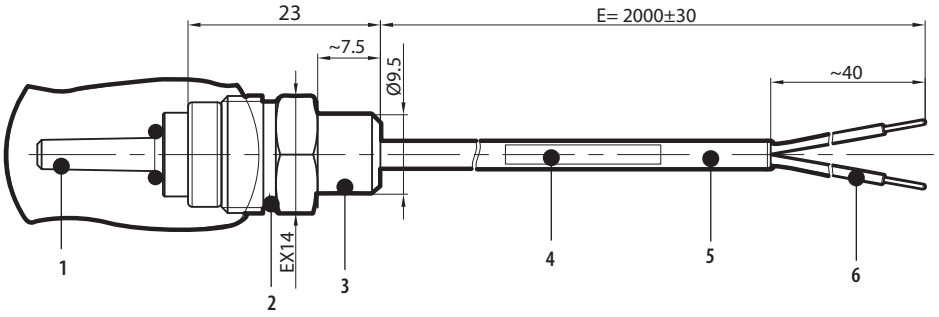

1	sensitive element
2	nickel-coated brass locking ring
3	co-moulded body
4	cable marking
5	tinned copper 2-wire cable
6	NTC sensor
7	2015 O-ring
8	nickel-coated brass thermometer socket

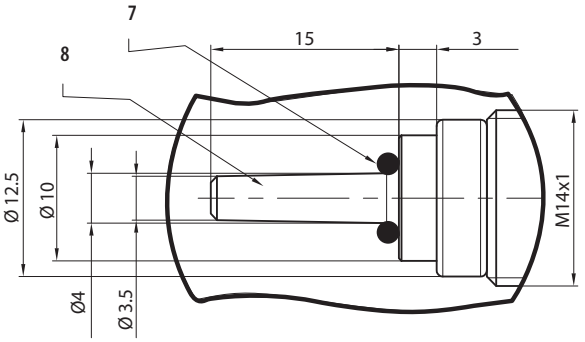

Wiring



Accessories:

Adapter from M14 to 3/8 GAS
Code TSOPZRV000

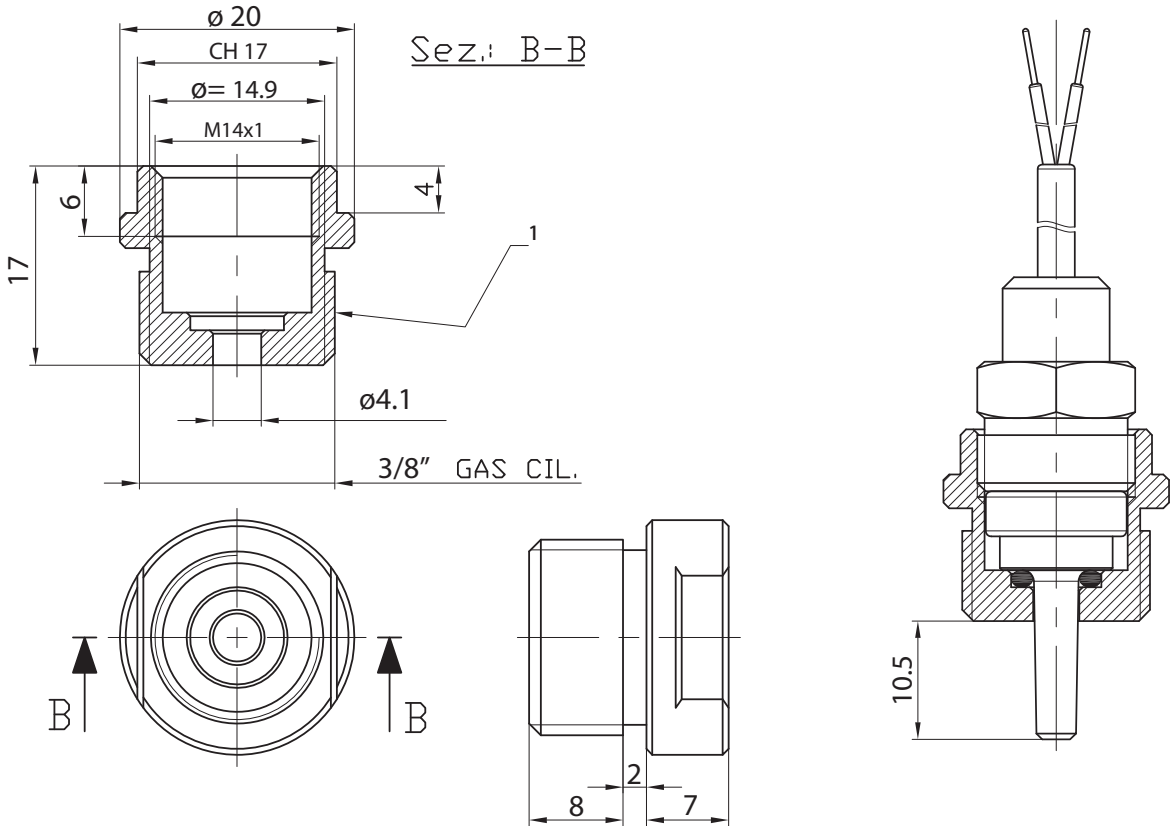

Weldable adapter for M14
Code TSOPZRS000

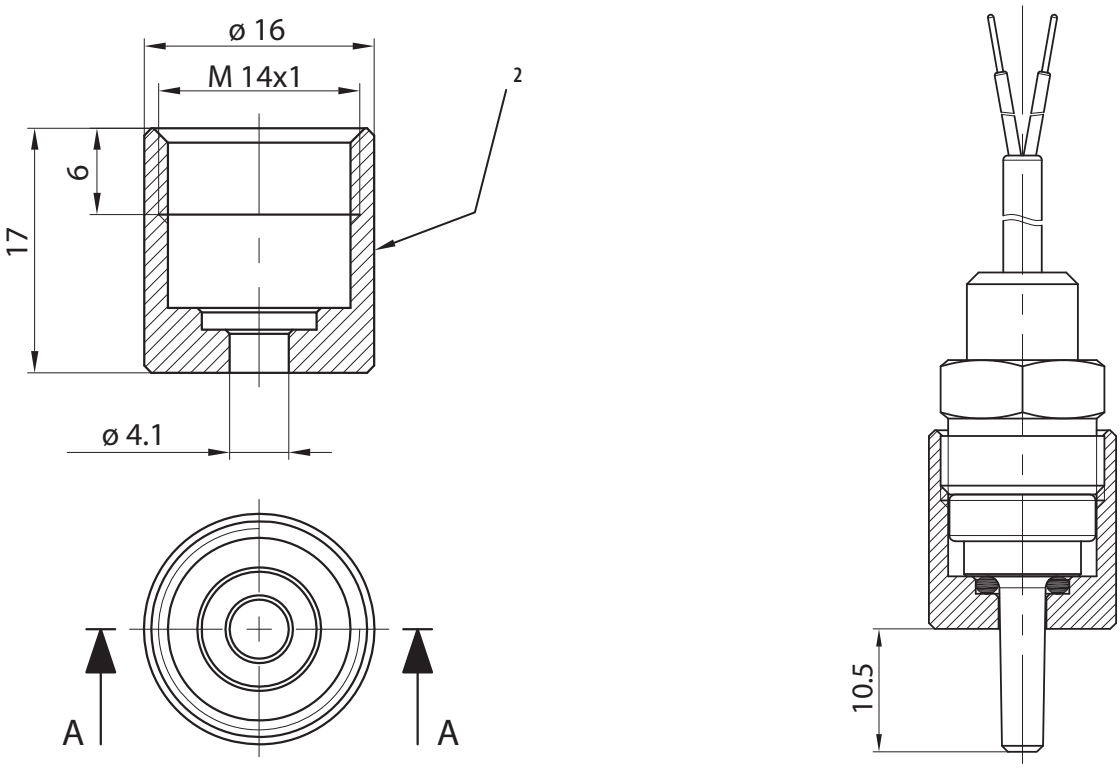

1	3/8 cyl. threaded fitting with round seat, nickel-coated brass	code: C058042A04
2	weldable cylindrical fitting with round seat, brass	code C058042A03

9.3 Models TSQ15MAB00

Storage conditions	-20T70 °C
Sensitive element operating range	-50T350 °C
Connections	3-pin DIN connector
Sensor	Pt1000 Class B
Thermal constant over time (in water)	approx. 2.5 s
Cable code TSOPZCV030 & code TSOPZCV100 & extension cable code TSOPZCV070	silicone cable L= 3 m, 10 m (max. temp. = 180 °C) with 3-pin DIN connector (max. conn. temp.= 90 °C) as per DIN-VDE0627 with M8x1 screw coupling.
Optional compression fitting TSOPZFGD30	AISI 316, 1/4 gas (see paragraph 4.4)
Index of protection connessione	IP65
Sensitive element housing	AISI 316 steel
Insulation resistance	Insulation at 100 Vdc > 100 mOhm
Category of resistance to heat and fire	flame retardant

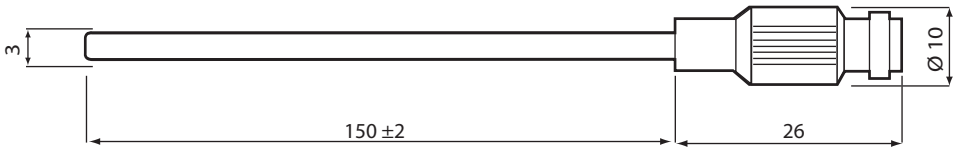

Accessories:

A

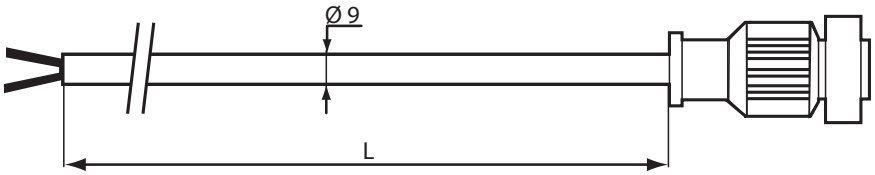

B

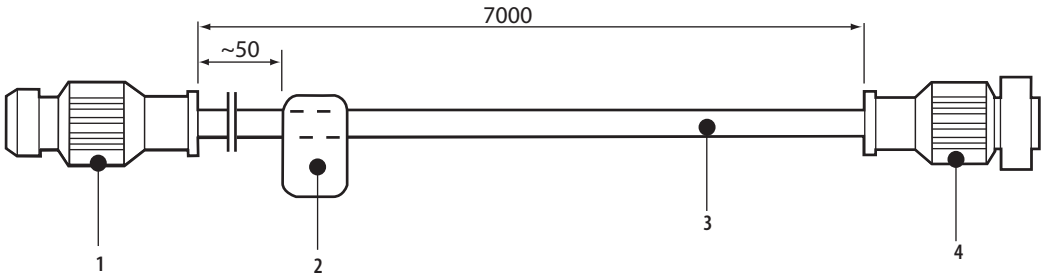

C



Key	
1	M8 connector
2	rating label
3	24 AWG 2 wire cable insulated with silicone rubber
4	M8 co-moulded connector
5	1/4" compression fitting - D= 3 mm, AISI316 steel

A	TSOPZCV030:	silicone cable with M8 connector, length 3 m
	TSOPZCV100:	silicone cable with M8 connector, length 10 m
B	TSOPZCV070:	silicone extension cable with M8 male/female connector, length 7 m
C	TSOPZFGD30:	compression fitting suitable for 3 mm

10. PT1000 PIERCING PROBE TECHNICAL SPECIFICATIONS

10.1 Model PT1INF0340

Piercing probe with "L" handle and heating system.

Storage conditions	-20T70 °C
Operating range	-50T200 °C
Connections	Stripped ends, with terminals
Sensor	Pt1000 Class B
Thermal constant over time (in water)	approx. 10 s
Cable	Food-safe thermoplastic sheath with 4 wires size 0.15 mm^2
Wire colours	White-black, PT1000 / red, electric heater.
Maximum heater voltage	24 Vac
Electrical resistance of heater	7 Ohm ±0.6
Cable length	3 m
Sensitive element index of protection	IP67
Sensitive element housing	AISI 316 stainless steel. Length 100 mm diam. 4 mm. With pointed tip
Cap filler	Aluminium
Classification according to protection against electric shock (sensitive element & cable)	Insulation: Outer sheath, and inside on wires
Category of resistance to heat and fire	Flame retardant
Insulation resistance	20 Mohm 500 Vdc
Dielectric strength	500 Vac

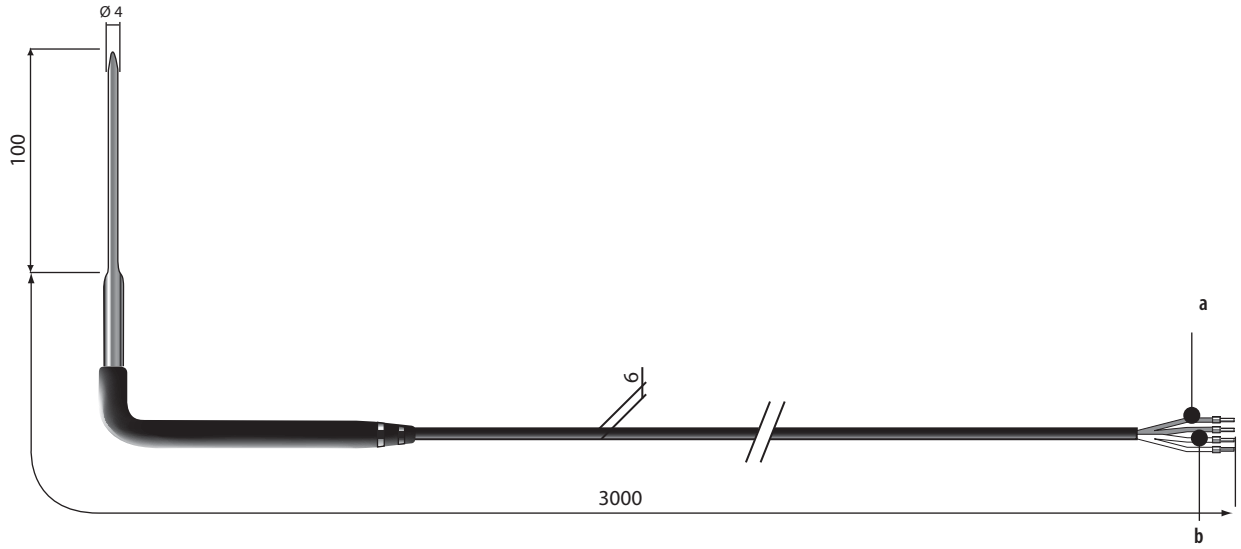

a	red, electric heater
b	white/black, NTC

11. PTC TECHNICAL SPECIFICATIONS

11.1 Models PTC0150000 – PTC0600000

Storage conditions	-20T70 °C
Operating range	0T150 °C
Connections	Stripped ends, dimensions 6±1mm
Sensor	SEN.KTY81/121-20/5
Precision	± 2 °C; 0T50 °C;
	± 3 °C; -50T90 °C;
	± 4 °C; 90T120 °C.
Dissipation factor (in air)	3 mW
Thermal constant over time (in air)	approx. 60 s (10 s in water)
Cable	Silicone
Sensitive element index of protection	IP65
Sensitive element housing	Dim. 40x6 mm
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Insulation resistance at 500 Vdc	>20 mOhm
Dielectric strength	2000 Vac

11.2 Models PTC015W000 - PTC060W000 - PTC060WA00

Storage conditions	-20T70 °C
Operating range	-50T100 °C
Connections	Stripped ends, dimensions 6±1mm
Sensor	SEN.KTY81/121-20/5
Precision	± 2 °C; 0T50 °C; ± 3 °C; -50T90 °C; ± 4 °C; 90T120 °C.
Dissipation factor (in air)	3 mW
Thermal constant over time (in air)	approx. 60 s (10 s in water)
Cable	Silicone
Sensitive element index of protection	IP67
Sensitive element housing	Dim. 40x6 mm - 180x6 mm (PTC060WA00)
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac
Insulation resistance at 500 Vdc	>20 mOhm
Dielectric strength	2000 Vac

11.3 Models PTC03000W1 - PTC03003000D1 - PTC03000G1

Storage conditions	-20T70 °C	
Operating range	PTC03000W1	Range -30*105 °C
	PTC03000D1	Range -30*105 °C
	PTC03000G1	Range -50*120 °C
Connections	Stripped ends, dimensions 6±1mm	
Sensor	SEN.KTY81/121-20/5	
Precision	± 2 °C; 0T50 °C; ± 3 °C; -50T90 °C; ± 4 °C; 90T120 °C.	
Dissipation factor (in air)	3 m	
Thermal constant over time (in air)	approx. 60 s (10 s in water)	
Cable	Black PVC (PTC03000D1) Grey silicone (PTC03000G1) White PVC (PTC03000W1)	
Sensitive element index of protection	IP67	
Sensitive element housing	Dim. 40x6 mm	
Classification according to protection against electric shock (sensitive element & cable)	Basic insulation for 250 Vac	
Insulation resistance at 500 Vdc	>20 mOhm	
Dielectric strength	2000 Vac	

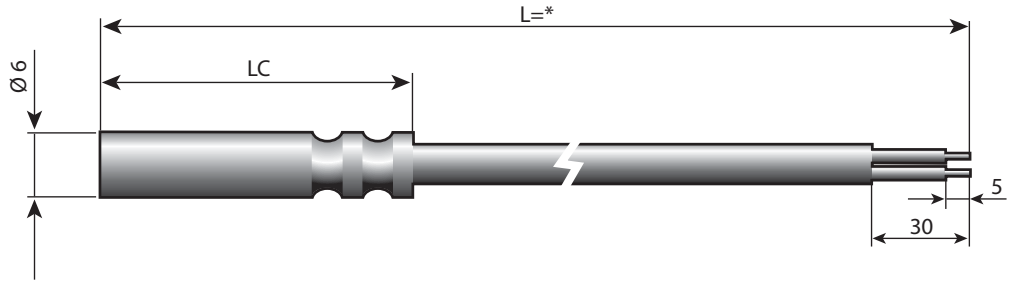

* = see table of product codes in price list

Accessories

Socket: nickel-coated brass - 1413306AXX

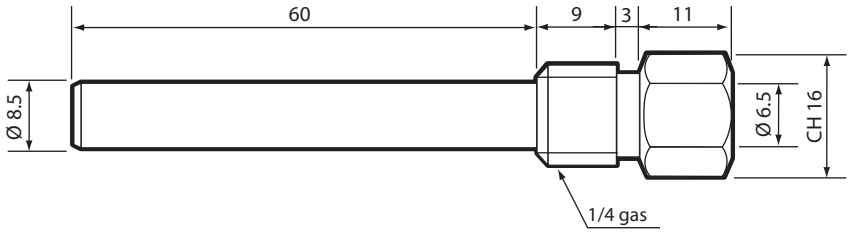

Socket 2: AISI 316 - code 1413309AXX

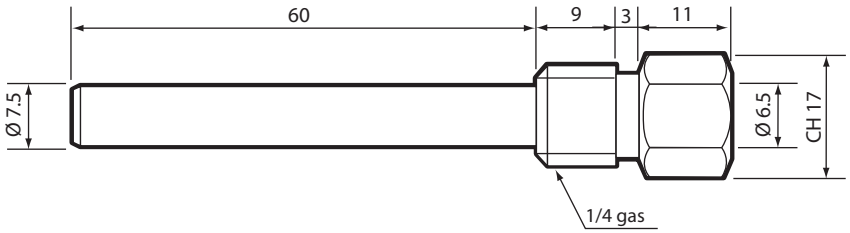

Note:

- cable secured with PG7 - IP68 cable gland applied to hexagonal end
- kit available complete with socket and cable gland

Compression fitting with metal olive - code 1309589AXX

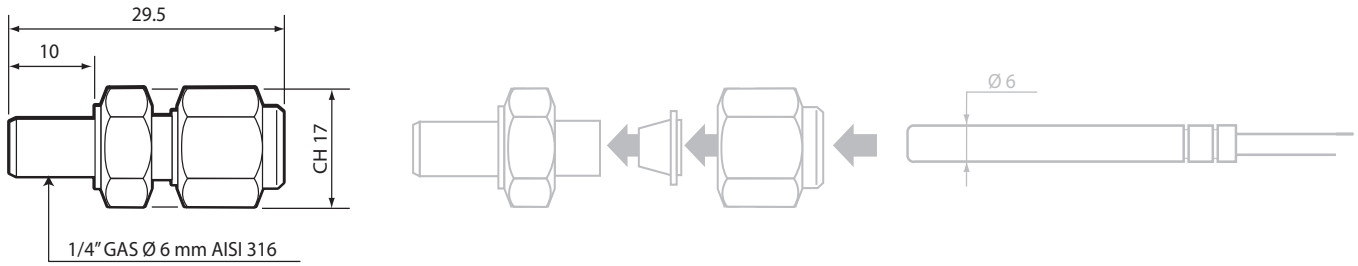

12. LIGHT SENSOR TECHNICAL SPECIFICATIONS

12.1 Model PSOPZLHT00

Storage conditions	-20T70 °C
Sensitive element operating range	-20T70 °C
Sensor	Perkin Elmer optoelectronics A906011 sensor
Capsule material	Transparent polypropylene with epoxy resin
Cable	Black PVC diam 4.6 mm
Power and output connections	Stripped ends, dimensions 6±1mm
Insulation resistance	20 Mohm 500 V
Dielectric strength	2000 Vac
Sensitive element housing	Transparent polypropylene
Sensitive element housing	Dim. 7x26 mm

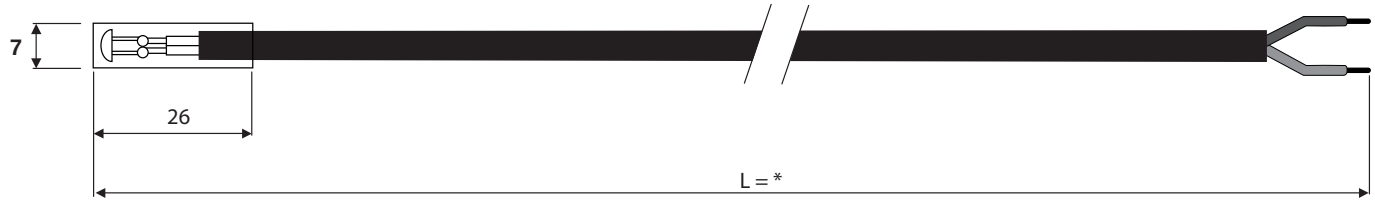

12.2 Sensitive element specifications

Type	R_{10}	R_{100}	R_{01}	R_{05}	V_{max}	P_{max}	$\gamma_{10/100}$	λ_{peak}
unit	KΩ	KΩ typ.	M Ωmin	MΩ min	V	mW	typ	nm
A 9060 11	9...20	3,5	0,06	0,18	150	90	0,65	600

13. ACCESSORIES

Coloured labels to be applied to the end of the sensors and simplify connection to the controller for installers

For refrigeration applicationsi

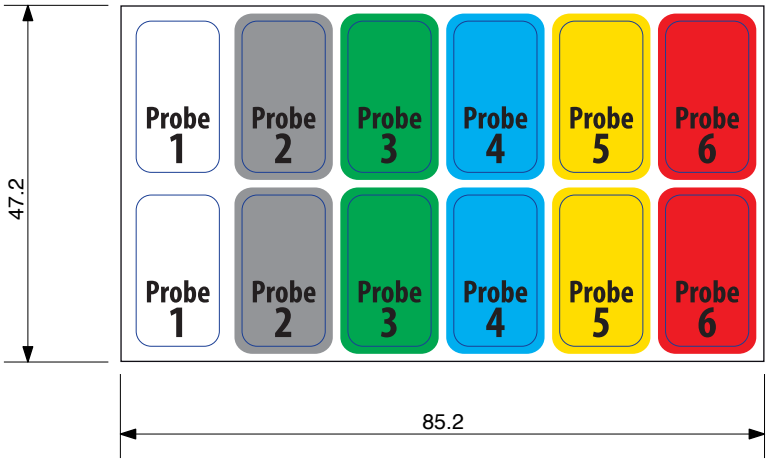

Cod. 62C588A005

For general applications

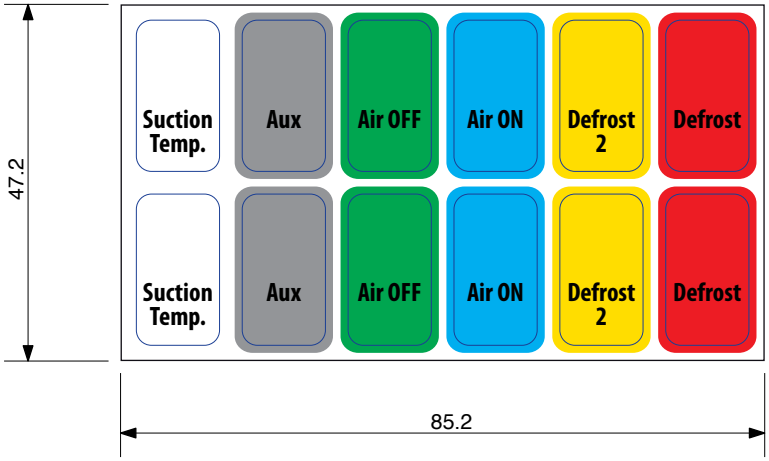

Cod. 62C588A006

Example

CAREL reserves the right to modify or change its products without prior notice.

CAREL

CAREL INDUSTRIES HQs
Via dell'Industria, 11 - 35020 Brugine - Padova (Italy)
Tel. (+39) 049.9716611 - Fax (+39) 049.9716600
e-mail: carel@carel.com - www.carel.com

Agenzia / *Agency*:

+030220655 rel. 1.6 - 02.12.2011